
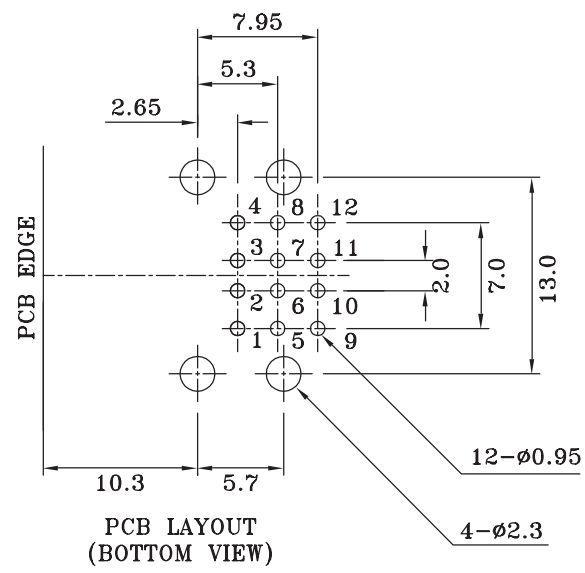


REV	DESCRIPTION	APPROVAL	DATE
A	Initial Release		07'.04.24

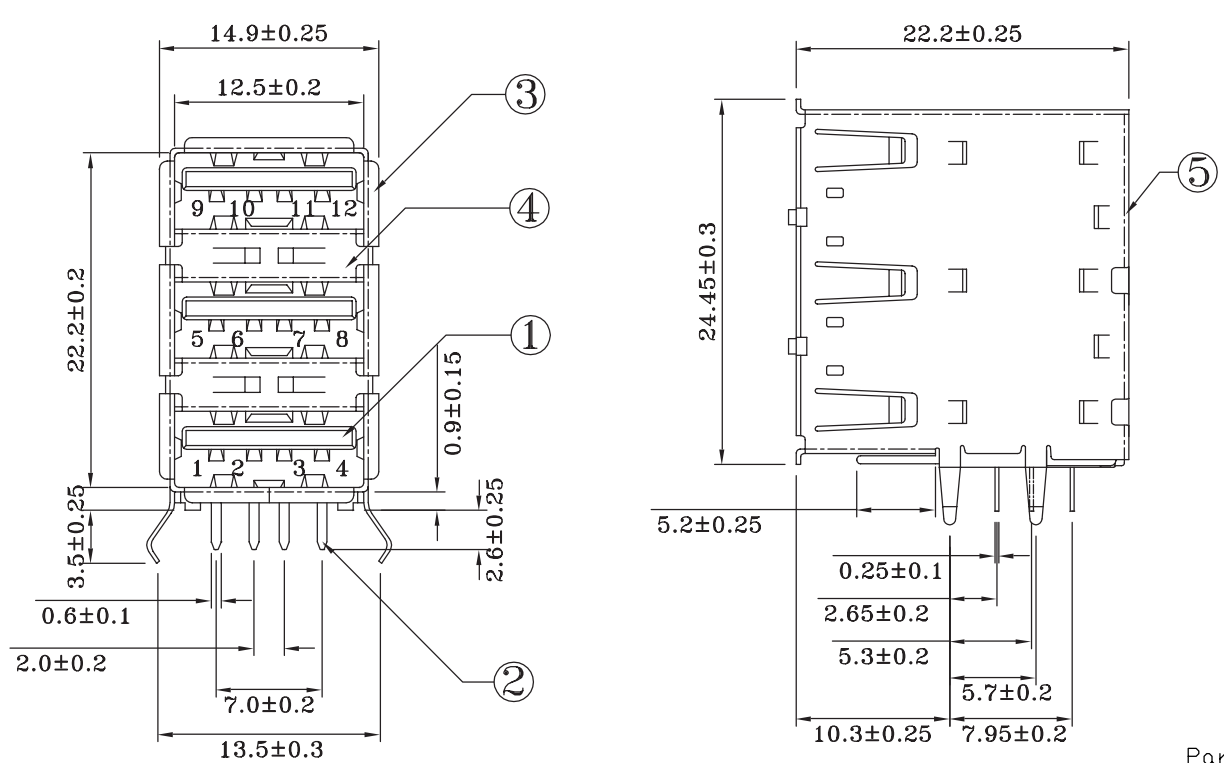

Specification:

- Contact resistance : 30 ohm maximum.
- Insulation resistance : 1000 ohm min. at 500 VDC
- Rated Voltage and Current : 1.5A at 250VAC minimum.
- Dielectric withstanding voltage : 750V AC(rms) for 1 minute
- Durability : 1500 cycles
- Insertion Force : 35 Newtons maximum
- Extraction Force : 10 Newtons minimum

Part no.

UAR01 - 4 F × 3 K ** J
1 2 3 4 5 6 7

1. USB A Type, Right Angle
2. Number of Contact : 4P
3. F : Female
4. Triple Deck
5. Insulator Color : K:Black
6. Gold Plating on Contact:
03 : 3u" Gold Flash in Front and Tin in Back Solder Tails
30 : 30u" Gold Flash in Front and Tin in Back Solder Tails
7. Plating on Shell:
J : Nickel

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	P.B.T.	BLACK	1
2	PIN TERM.	PHOS. BRONZE	GOLD-TIN PLATED	12
3	SHELL	BRASS,0.3mm	TIN PLATED	1
4	SHELL	BRASS,0.3mm	TIN PLATED	1
5	SHELL	SPCC,0.3mm	NICKEL PLATED	1
6	BOTTOM COVER	P.B.T.	BLACK	1

TOLERANCE
±0.3

貝強實業有限公司 PANSTRONG COMPANY LTD.	DRAWN BY	TOMMY	
	CHECKED		
TITLE:	USBA Receptacle, Triple, R/A	APPROVED	
PART NO:	UAR01-4Fx3K** *	DRAW NO	
File Number:			
SCALE	2:1	REV	A
	UNIT	mm	