


REV	DESCRIPTION	APPROVAL	DEAT
D	新制定		06.05.08

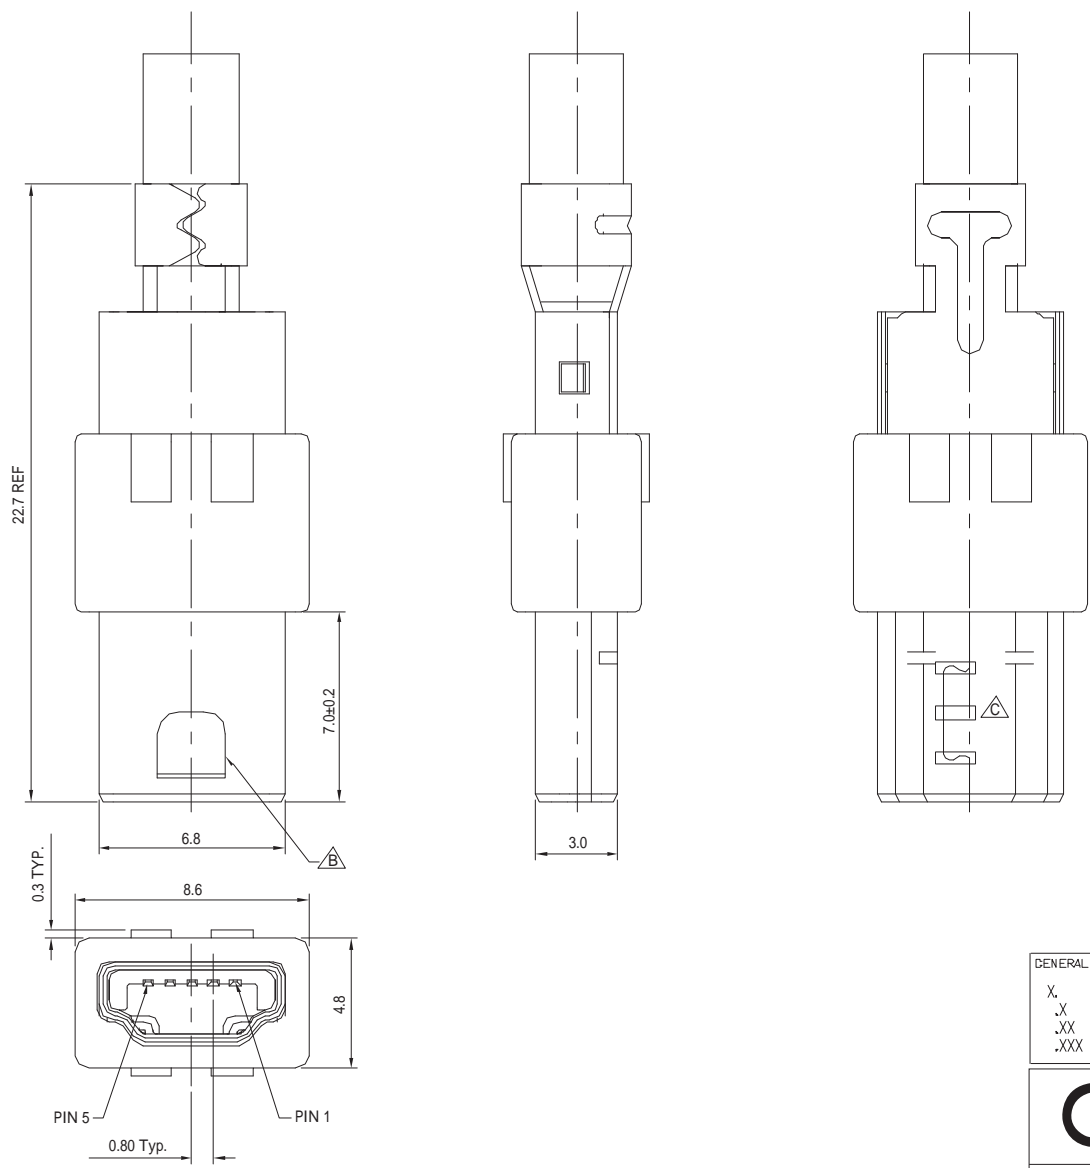

MATERIALS AND FINISH:
 SHELL: COPPER ALLOY/TIN PLATING
 INSULATOR: HIGH TEMP. PA6T THERMOPLASTIC 240, UL 94V-0 RATED, NATURE
 CONTACTS: PHOSPHOR BRONZE/30u" GOLD PLATING

ELECTRICAL SPECIFICATIONS:
 RATED VOLTAGE: 30V AC (rms)
 CONTACT CURRENT RATING: 1A MAX.
 CONTACT RESISTANCE: 50 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING: 100V AC
 OPERATING TEMPERATURE: 0 to +40

PART NO.

MUSB $\frac{A}{1}$ $\frac{5}{2}$ $\frac{M}{3}$ $\frac{01}{4}$ $\frac{W}{5}$ $\frac{30}{6}$

- MINI USB A TYPE
- No. of Contact: 5 Positions
- M: Plug
- 01: Wire Soldering
- Color of Insulation: W White, K Black
- Plating of Contact: 30: 30u" Gold, 05: 05u" Gold

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.30	X'	±3.0°
.X	±0.25	.X'	±2.0°
.XX	±0.13	.XX'	±1.0°
.XXX	±0.06		

ROHS-COMPLIANT

貝強實業有限公司 PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		MINI A PLUG, 5 POSITIONS SOLDER TYPE				APPROVED	
PART NO:		MUSBA5M01W30				DRAW NO	
DRAW. BOX NO:							
SCALE		5:1	REV	G	UNIT	mm	