REV	DESCRIPTION	APPROVAL	DATE
A	新制定		07'.01.22

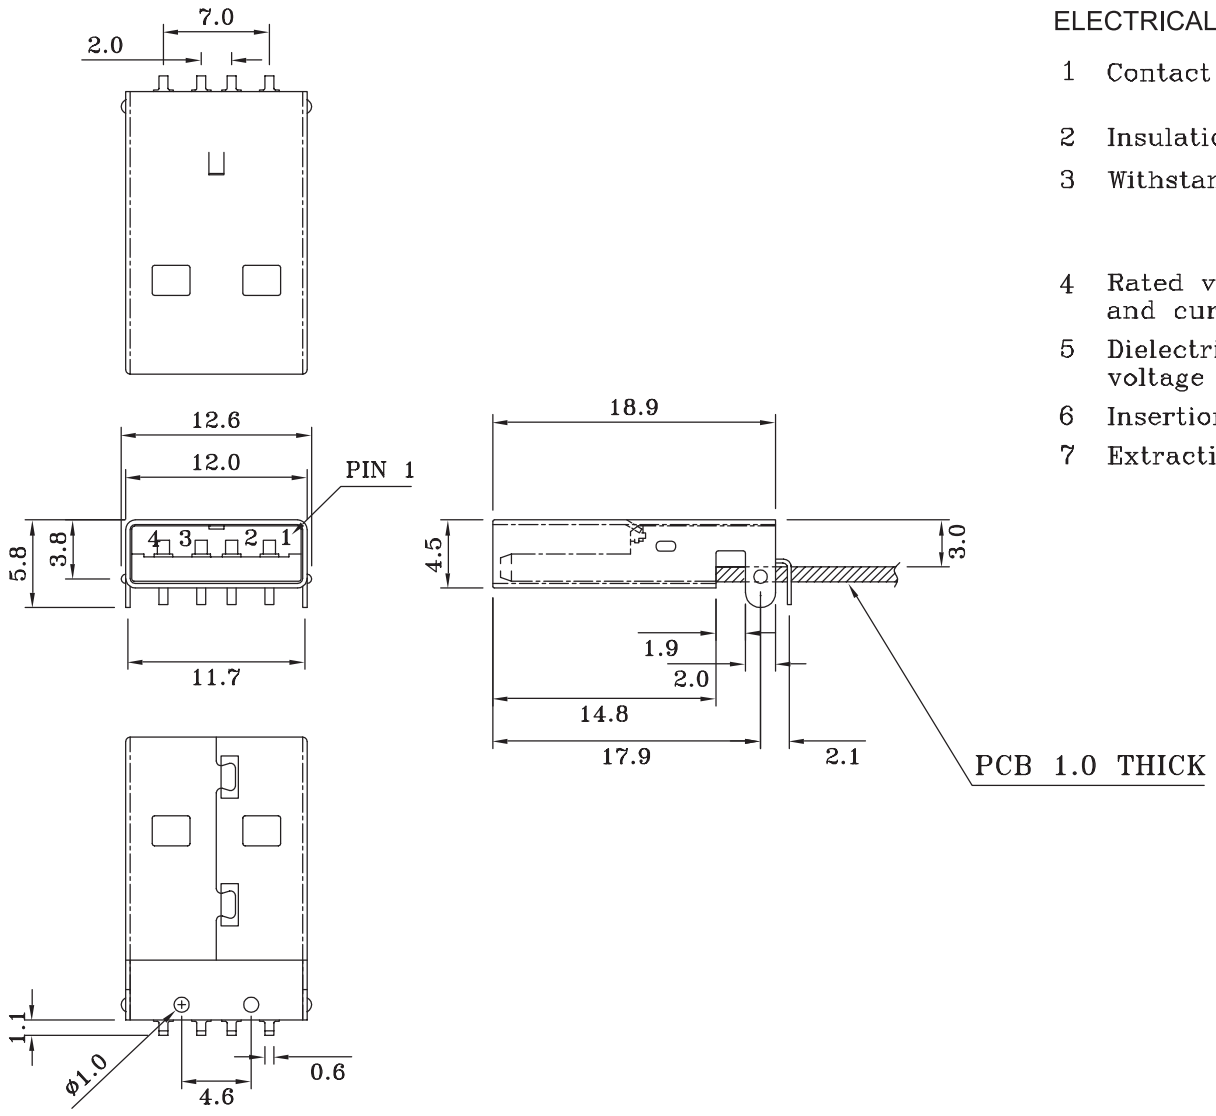

ELECTRICAL CHARACTERISTICS:

1 Contact resistance : Before life test: 30m ohm. max.
After life test: 50m ohm. max.

2 Insulation resistance : 1000M ohm min.

3 Withstand voltage : 500V AC applied between adjacent open terminals for one minute without breakdown.

4 Rated voltage and current : 1.5A MAXIMUM at 30VAC (R.M.S.)

5 Dielectric withstanding voltage : 750V AC/1 minute without breakdown.

6 Insertion force : 35 Newtons maximum

7 Extraction force : 10 Newtons minimum

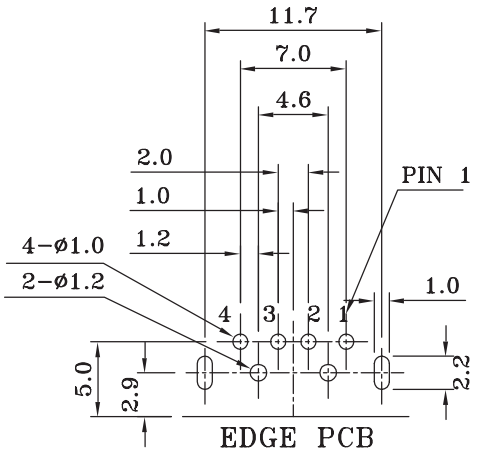

COMPONENT SIDE
(PCB LAYOUT)

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	NYLON PA9T.G.F.	WHITE /BLACK		1
2	PIN TERM.	BRASS EH T:0.25 mm	GOLD/TIN PLATED	NI:1~1.5u;TIN:3u. GOLD:1~3 u"	4
3	SHELL	BRASS T:0.3 mm	NICKEL PLATED	NI:2~3u	1

TOLERANCE
±0.3

貝強實業有限公司
PANSTRONG COMPANY LTD.

TITLE:	USB. TYPE A PLUG FLAT90° DIP			DRAWN BY	TOMMY
PART NO:	USBA4M0101X03			CHECKED	
File Number:				APPROVED	
SCALE	2:1	REV	A	DRAW NO	
				UNIT	mm