


ELECTRICAL:
VOLTAGE RATING
 5.0V
CURRENT RATING
 0.5A
CONTACT RESISTANCE
 Terminal: 50mΩ max
DIELECTRIC WITHSTANDING VOLTAGE
 100V AC/1 min
INSULATION RESISTANCE
 1G Ω min

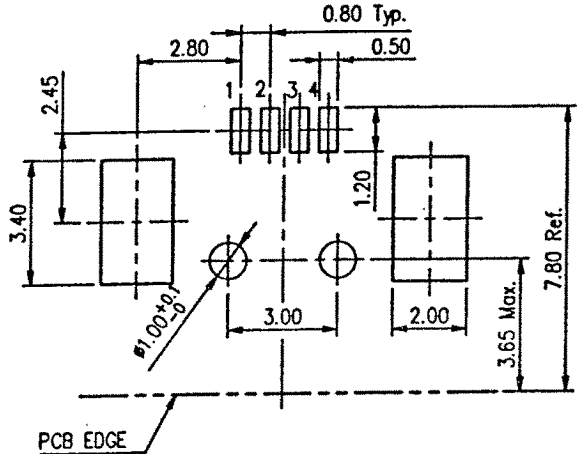

Recommended PC Board Layout

PART NO. MUSBA4F0301Kxx

No.	PART NAME	DESCRIPTION	PLATING	THICKNESS	Q'TY
3	Shell	Stainless		0.2 mm	1
2	Contact	Phosphor Bronze	Selective 10 μ ^m	0.25 mm	4
1	Housing	Nylon 6T			1

GENERAL TOLERANCE		DRAWN DATE		
.x +/-0.1 .xx +/-0.05		Jacky Wang DESIGN DATE		
MATERIAL		CHECKED DATE		
FINISH		K.C. Lin APPROVED DATE		TITLE
SCALE 5:1 UNIT mm		SHEET 1 OF 1		MINI USB, A TYPE 4 PIN, SOCKET, SMT
				SERIES MUSBA4F SIZE
				DRAWING NO. USBA4F0301K REV.