



| REV | DESCRIPTION | DATE |
|-----|---------------------|----------|
| A | Check & Change DIM | 06.05.09 |
| B | Redraw P.C.B Layout | |

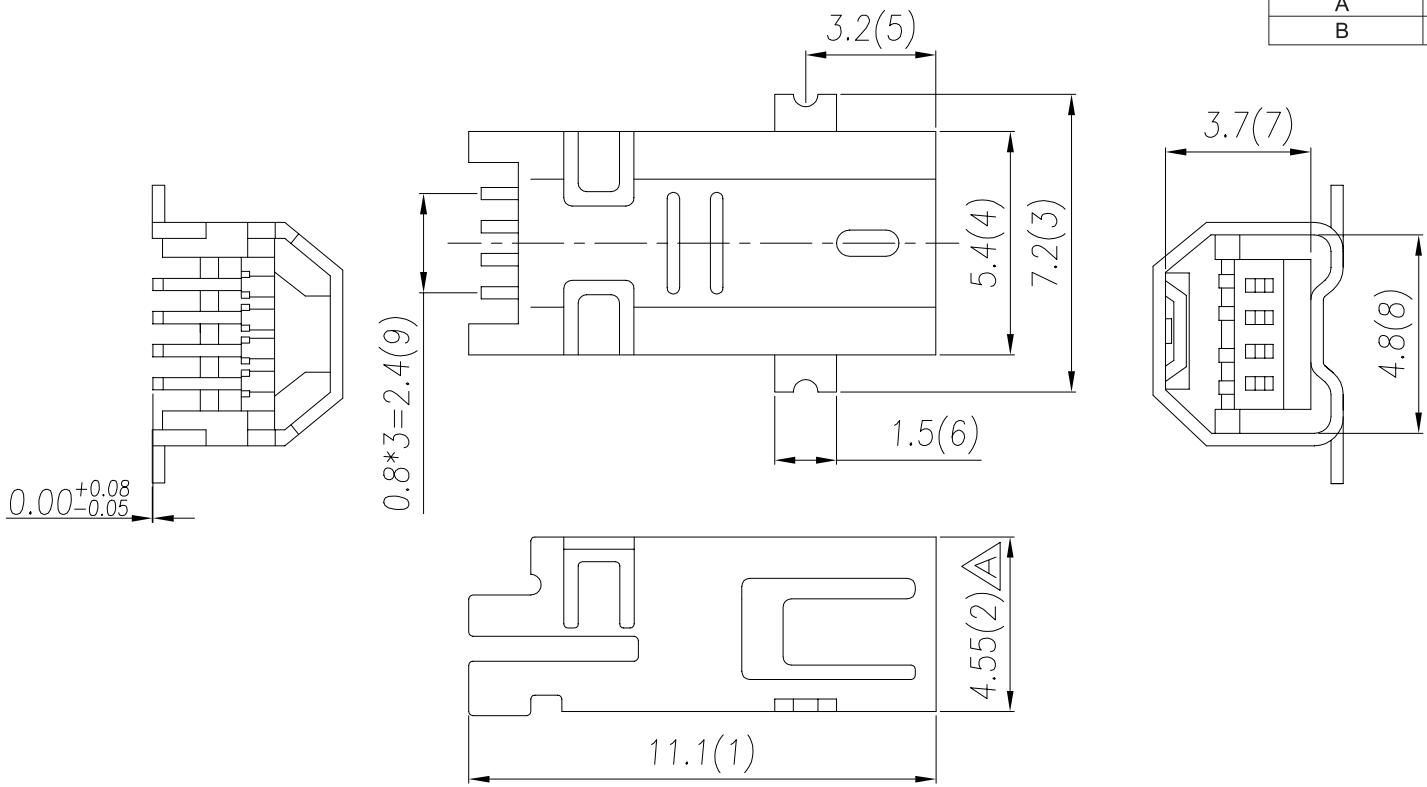

1. Safety:
 - 1-1 Rating: AC 5V/1A
 - 1-2 Insulation Resistance: 100M ohm Min at DC 500V
 - 1-3 Dielectric Withstanding Voltage: AC 100V for 1 minute
 - 1-4 Contact Resistance: 30m ohm or less
2. Material:
 - 2-1 PIN: PHOSPHOR BRONZE; GOLD 15u"
 - 2-2 HOUSING: NYLON
 - 2-3 SHELL: PHOSPHOR BRONZE; TIN



PART NO.
 MUSB B 4 F 03 01 K 15
 1 2 3 4 5 6 7

1. MINI USB B TYPE
2. No. of Contact: 4 Positions
3. F: Socket
4. 03: SMT
5. 01: Right Angle
6. Color of Insulation: K Black, W White
7. Plating of Contact: 05: 05u" Gold 30: 30u" Gold

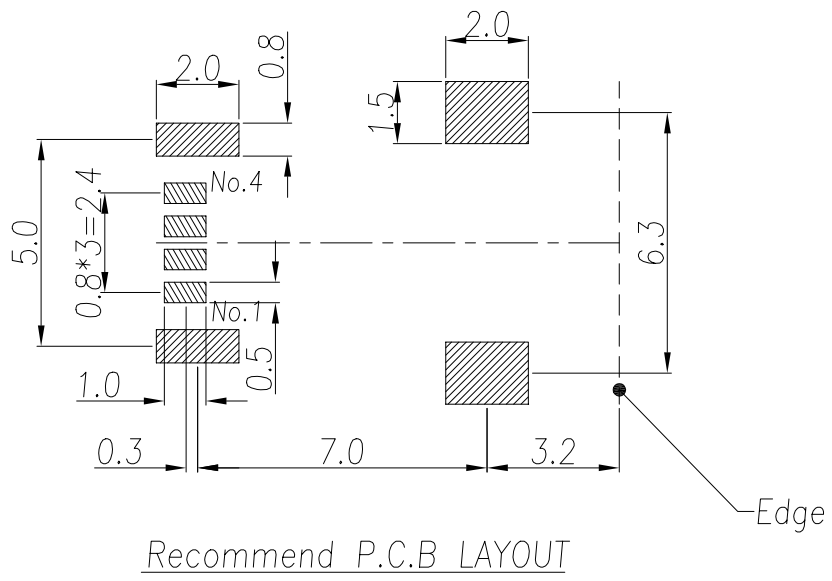

ROHS-COMPLIANT

| GENERAL TOLERANCE | ANGLE TOLERANCE |
|-------------------|-----------------|
| X, ±0.30 | X°, ±3.0° |
| .X ±0.25 | .X°, ±2.0° |
| .XX ±0.13 | .XX°, ±1.0° |
| .XXX ±0.05 | |

| | | |
|--|--|---|
|  貝強實業有限公司 PANSTRONG COMPANY LTD. | DRAWN BY | TOMMY |
| | CHECKED | |
| TITLE: | MINI USB, B TYPE 4 PIN, SOCKET, SMT | |
| PART NO: | MUSBB4F0301Kxx | |
| DRAW. BOX NO: | | |
| SCALE | 1:1 | REV B |
| UNIT | mm |  |