

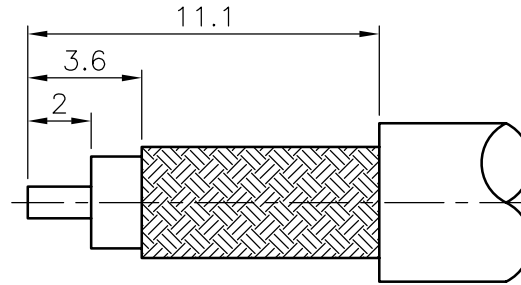
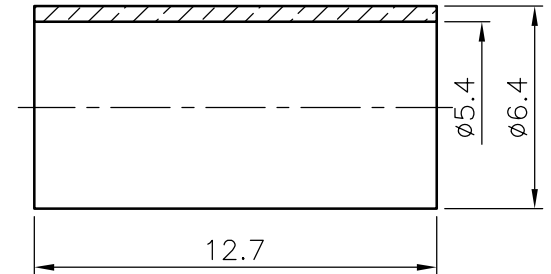


REMARK: RoHS COMPLIANT

REV	DESCRIPTION	DATE
A	Initial Release	06'.08.02

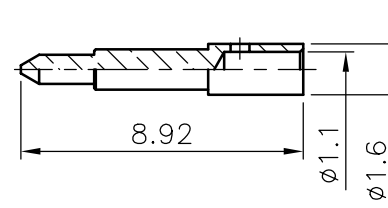

RECOMMENDED
CABLE STRIPPING DIM'S

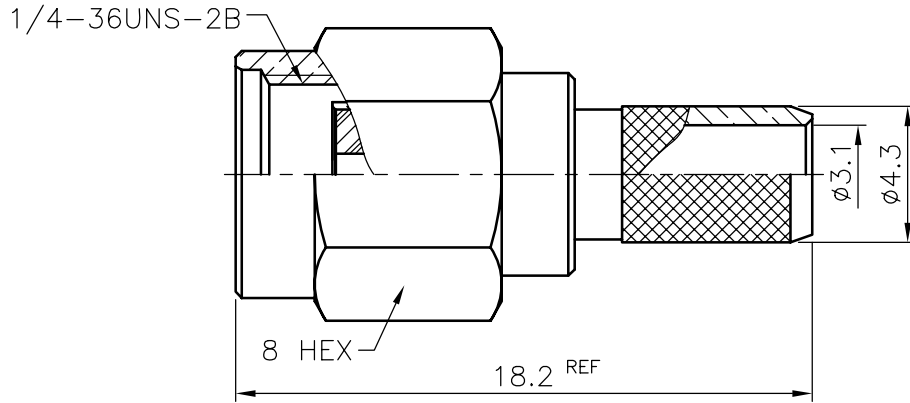

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - BERYLLIUM COPPER PER QQ-C-530
 - BRASS JIS H 3250, C 2700

- CRIMPED FERRULE
HEX CRIMP SIZE .213" (5.41mm)
- CONTACT PIN TO SOLDER

FERRULE	NOTE 6	NOTE 2
CONTACT PIN	NOTE 1	NOTE 3
SHELL	NOTE 1	NOTE 2
C RING	NOTE 5	NONE
GASKET	SILICONE	RED
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED
TOLERANCES

0.5-6 = ±0.2
 >6-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1
 >315-1000 = ±1.6
 ANGLES = ±5°

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		SMA CRIMP PLUG (FOR RG-58/U, 58C/U)				APPROVED	
PART NO:		SMAM02G0111-58				DRAW NO	
File Number:							
SCALE	4:1	REV	A	UNIT	mm		