

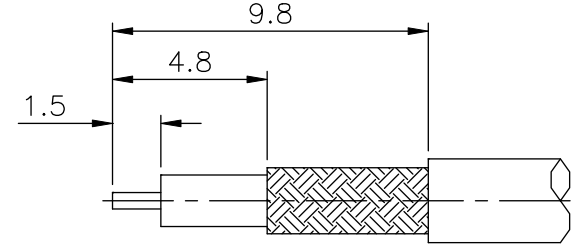


REMARK: RoHS COMPLIANT

REV	DESCRIPTION	DATE
A	Initial Release	06'.08.14

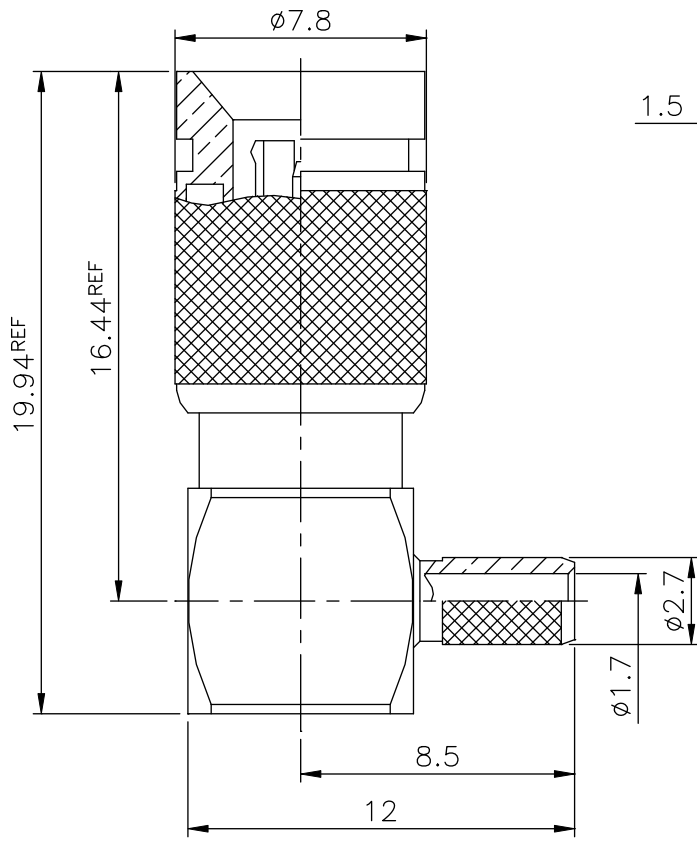

RECOMMENDED  
CABLE STRIPPING DIM'S

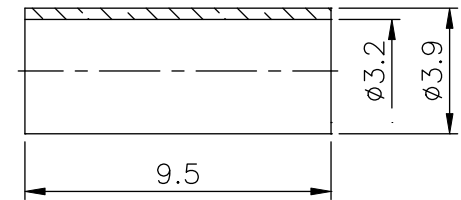


1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)
2. CONTACT PIN TO SOLDER

FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD FLUSH MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
7. BRASS JIS H 3250, C 2700

COVER	NOTE 1	NOTE 2
FERRULE	NOTE 7	NOTE 2
SHELL	NOTE 1	NOTE 2
SPRING	NOTE 5	NOTE 2
CONTACT BODY	NOTE 5	NOTE 3
CONTACT PIN	NOTE 1	NOTE 6
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
CUBE BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH



UNLESS OTHERWISE SPECIFIED  
TOLERANCES

0.5-6	= ±0.2
>6-30	= ±0.4
>30-120	= ±0.6
>120-315	= ±1
>315-1000	= ±1.6
ANGLES	= ±5°

<b>PANSTRONG COMPANY LTD.</b>				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		1.0/2.6 R/A CRIMP PLUG (FOR RG-714/U,188A/U,316/U)				APPROVED	
PART NO:		1023M01N0111				DRAWING NO.	
SCALE		4:1	REV	A	UNIT	mm	