

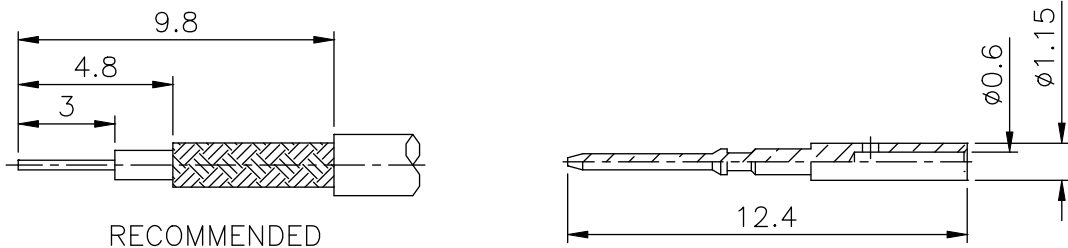


REMARK: RoHS COMPLIANT

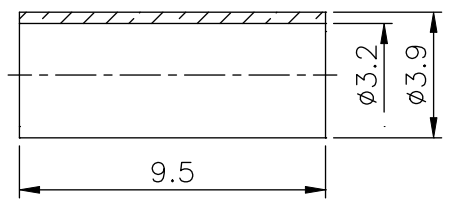

RECOMMENDED  
CABLE STRIPPING DIM'S

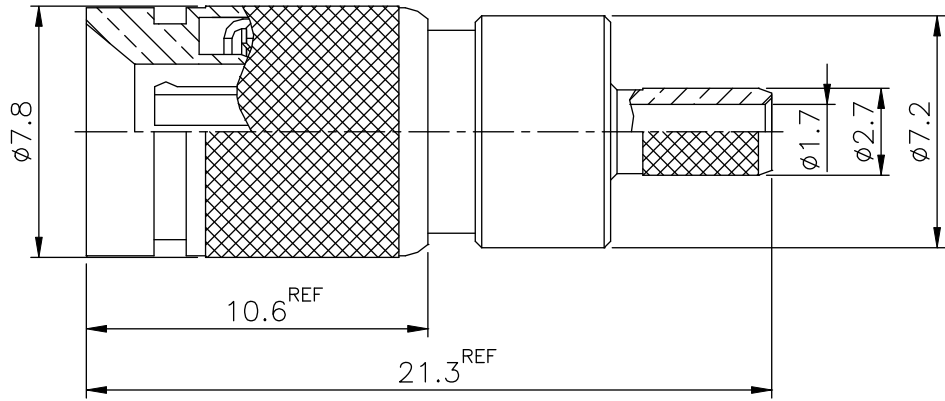

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)
2. CONTACT PIN TO SOLDER

REV	DESCRIPTION	DATE
A	Initial Release	06'.08.09

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. BERYLLIUM COPPER PER QQ-C-530
  6. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  7. BRASS JIS H 3250, C 2700

FERRULE	NOTE 7	NOTE 2
CONTACT PIN	NOTE 1	NOTE 6
SHELL	NOTE 1	NOTE 2
SPRING	NOTE 5	NOTE 2
CONTACT BODY	NOTE 5	NOTE 3
INSULATOR	NOTE 4	WHITE
BRAID HOLDER	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED  
TOLERANCES  
0.5-0.6 = ±0.2  
>0.6-1.0 = ±0.4  
>1.0-1.2 = ±0.6  
>1.2-3.15 = ±1  
>3.15-1000 = ±1.6  
ANGLES = ±5°

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		1.0/2.3 CRIMP PLUG (FOR RG-174/U,188A/U,316/U)				APPROVED	
PART NO:		1023M02N0111				DRAWING NO.	
SCALE		4:1	REV	A	UNIT	mm	