

REV	DESCRIPTION	APPROVAL	DATE
A	新制定		06.06.27

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical

Current Rating : 1 A mp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105 °C

◆Terminated with 1.27mm pitch flat ribbon cable.

PART NO. : DC xx M 0102 G 00 E 2



Position

Grey Color

Blank: W/O Ears 2: With Ears

00 Selective Gold Flash

01 Fully Gold Flash

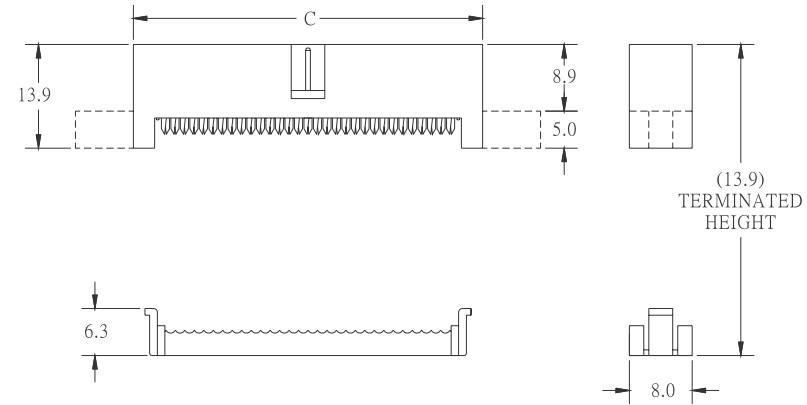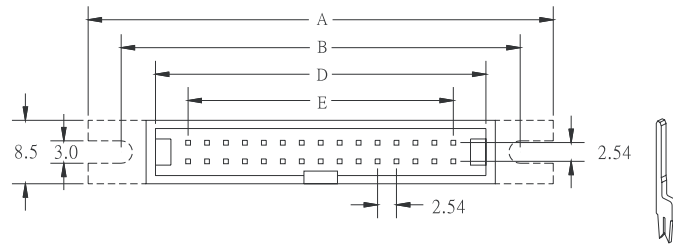

POSITION	A	B	C	D	E
10	36.96	28.60	21.42	18.30	10.16
14	42.04	33.68	26.50	23.38	15.24
16	44.58	36.22	29.04	25.92	17.78
20	49.66	41.30	34.12	31.00	22.86
24	54.74	46.38	39.20	36.08	27.94
26	57.28	48.92	41.74	38.62	30.48
30	62.36	54.00	46.82	43.70	35.56
34	67.44	59.08	51.90	48.78	40.64
40	75.06	66.70	59.52	56.40	48.26
50	87.76	79.40	72.22	69.10	60.96
60	100.46	92.10	84.92	81.80	73.66
64	105.54	97.18	90.00	86.88	78.74

 貝強實業有限公司 PANSTRONG COMPANY LTD.			DRAWN BY		TOMMY
			CHECKED		
TITLE:			APPROVED		
PART NO.:			DRAW NO		
DRAW . BOX NO.:					
SCALE	REV	A	UNIT	mm	