


REV.	ECO.	NO.	APPD
A	REL.	ALAN 01/24'02	

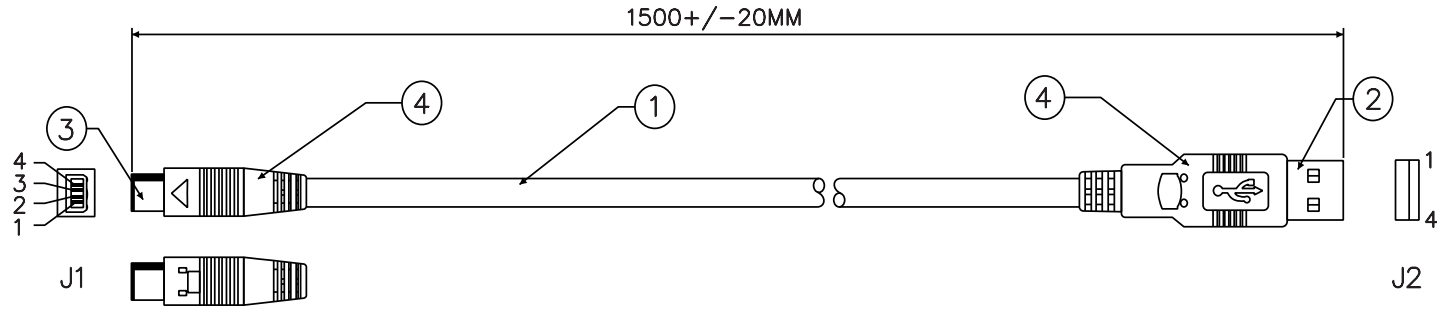

1. ALL DIMENSIONS ARE "MM"  
 2. ANY OPEN, MISWIRING & SHORT & INTERMITTENT ARE NOT PERMITTED.

4	OUTER MOLDED	12gm	PVC, 45P BLACK
3	MINI USB 4P MALE CONN. A	1SET	CONTACT: 10u" GOLD PLATED INSULATOR: COLOR: BLACK SHIELD CASE(TOP & BOTTOM): NICKEL PLATED
2	USB 4POS. MALE CONN. ("A" TYPE) (SOLDER TYPE)	1SET	CONTACT: 5u" GOLD PLATED INSULATOR: COLOR: WHITE, UL94V-0 SHIELD CASE: NICKEL PLATED COVER: BLACK, FOR USB A CONN.
1	CABLE	1PC	#28x1P+#28x2C+AL/MYLAR+DRAIN WIRE+BRAID COVERAGE: 65%+JACKET:PVC O.D= $\phi$ 3.5±0.1MM UL2725
No.	ITEM	Q'TY	DESCRIPTION

—	EMPTY	4		
SHELL	BRAID & DRAIN WIRE	SHELL		
4	BLACK	28AWG	4	
3	GREEN	TWIST PAIR	28AWG	3
2	WHITE		28AWG	2
1	RED	28AWG	1	
J1	WIRE COLOR		J2	
WIRE CONNECTION TABLE				

x.:±	.xx:±0.25	x° :±	.xx° :±	PART NO.(INTENDED USE)	TITLE:
.x:± 0.5	.xxx:±	.x° :±	.xxx° :±	APPD: ALAN 01/24'02	DWG NO.: ZK-U08
<b>PANSTRONG COMPANY LTD</b>				CHKD: ALAN 01/24'02	
				DR: Lin 01/24'02	