


REV	DESCRIPTION	DATE
A	Initial Release	07'.12.20
B	ADD P/N	12'.08.01

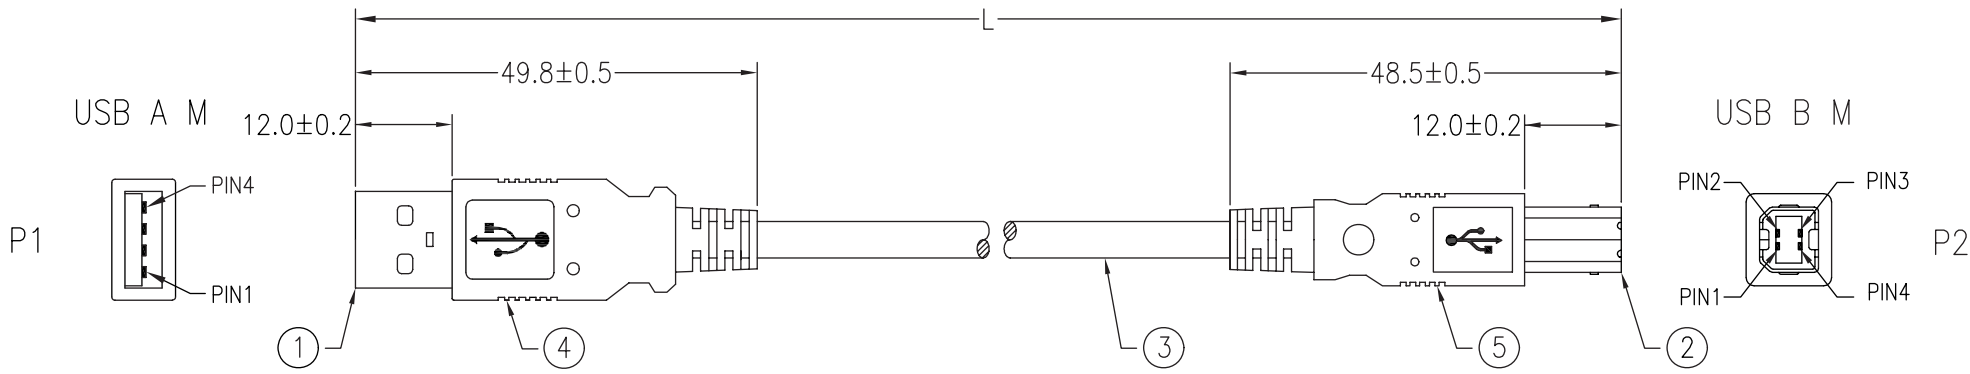

P1	P2
1	1 RED 24#
2	2 WHITE
3	3 GREEN
4	4 BLACK 24#
SHIELD	SHIELD

★ NOTE: All relevant materials are complied with RoHS directive .

5	MOLDED PVC BLACK	
4	MOLDED PVC BLACK	
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG OD 4.5mm, JACKET BLACK	L-20mm
2	USB B MALE 2.0, CONTACT FLASH GOLD PLATING, WHITE INSULATOR, SHORT TYPE	1set
1	USB A MALE 2.0, CONTACT FLASH GOLD PLATING, WHITE INSULATOR, SHORT TYPE	1set
No.	DESCRIPTION	Q'TY

P/N	L
CB2-0101DSK-2-0.5M	500+/-30
CB2-0101DSK-2-1M	1000+/-30
CB2-0101DSK-2-1.5M	1500+/-50
CB2-0101DSK-2-1.8M	1800+/-50
CB2-0101DSK-2-2M	2000+/-50
CB2-0101DSK-2-3M	3000+/-100
CB2-0101DSK-2-5M	5000+/-100

Cable Length Unless Other Spec:  
Tolerances:  
0 ~200mm ±10mm  
201 ~1000mm ±20mm  
1001 ~1500mm ±25mm  
1501 ~2100mm ±30mm  
2100mm † ±40mm

		DRAWN BY	TOMMY
		CHECKED	
TITLE:	USB 2.0 AM to BM Cable Assembly		APPROVED
PART NO:	CB2-0101DSK-2 Series		DRAWING NO.
SCALE	/	REV	B
UNIT	mm		