
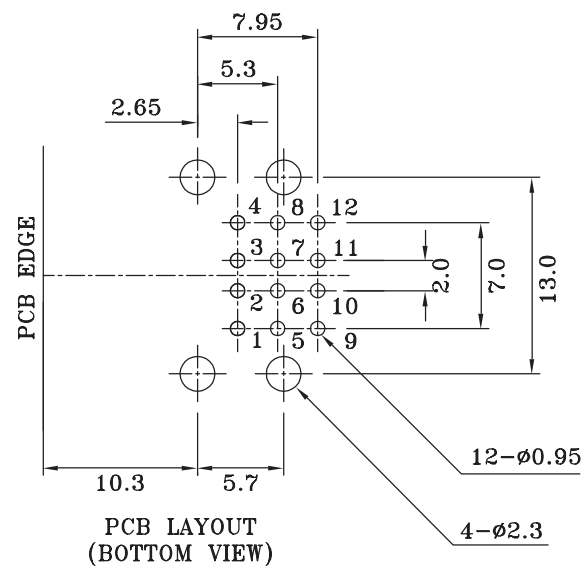


REV	DESCRIPTION	DATE
A	Initial Release	07:04.24
B	Correction for Plating Description	17:03.28

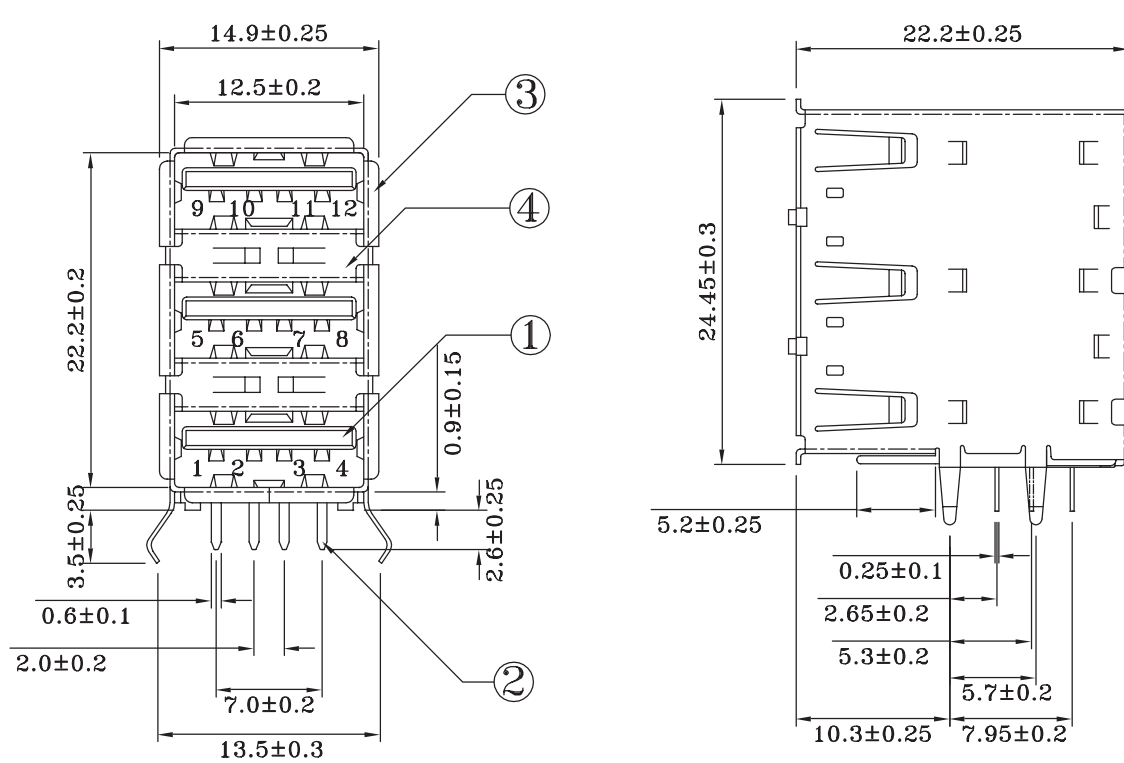

Part no.
 UAR01 - 4 F x 3 K ** J
 1 2 3 4 5 6 7

1. USB A Type, Right Angle
2. Number of Contact : 4P
3. F : Female
4. Triple Deck
5. Insulator Color : K:Black
6. Gold Plating on Contact:
 03 : 3u" Gold Flash in Front and Tin in Back Solder Tails
 30 : 30u" Gold Flash in Front and Tin in Back Solder Tails
7. Plating on Shell:
 J: Bright Tin on Body and Partition Shells, Nickel on Back Shell

Specification:
 -Contact resistance : 30 ohm maximum.
 -Insulation resistance : 1000 ohm min. at 500 VDC
 -Rated Voltage and Current : 1.5A MAXIMUM at 30 VAC (R.M.S)
 -Dielectric withstanding voltage : 500V AC(rms) for 1 minute
 -Durability : 1500 cycles
 -Insertion Force : 35 Newtons maximum
 -Extraction Force : 10 Newtons minimum

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	P.B.T.	BLACK	1
2	PIN TERM.	PHOS. BRONZE	GOLD-TIN PLATED	12
3	BODY SHELL	BRASS,0.3mm	TIN PLATED	1
4	PARTITION SHELL	BRASS,0.3mm	TIN PLATED	1
5	BACK SHELL	SPCC,0.3mm	NICKEL PLATED	1
6	BOTTOM COVER	P.B.T.	BLACK	1

TOLERANCE
±0.3

	PANSTRONG COMPANY LTD.		DRAWN BY	TOMMY
			CHECKED	
TITLE:	USB A Receptacle Triple, R/A		APPROVED	
PART NO:	UAR01-4Fx3K***		DRAWING NO.	
SCALE	2:1	REV	B	UNIT mm