



REV	DESCRIPTION	DATE
A	Initial Release	07.01.22

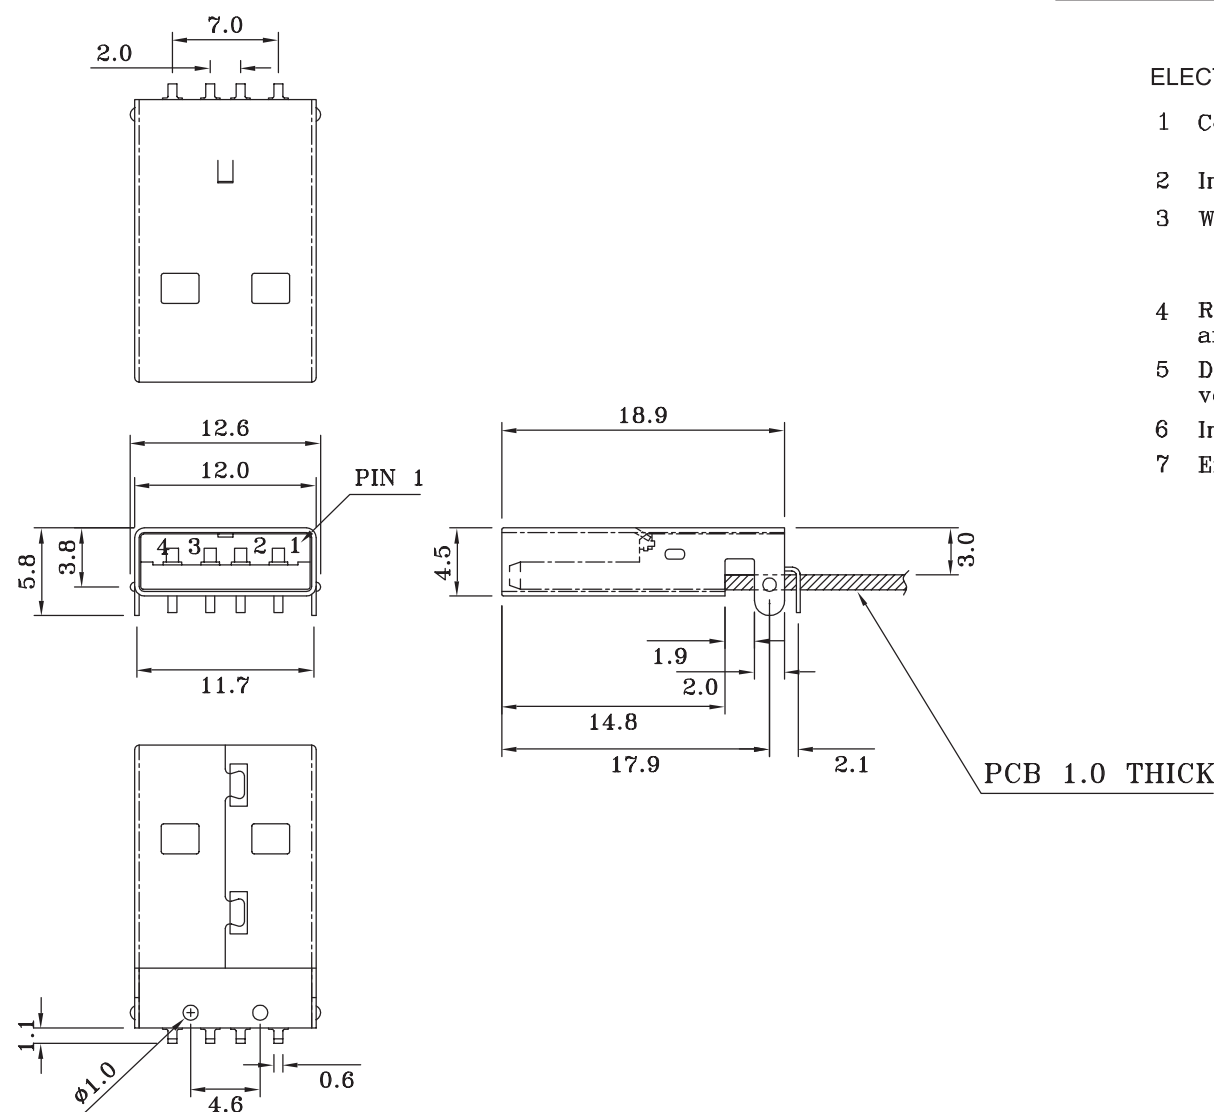

ELECTRICAL CHARACTERISTICS:

- 1 Contact resistance : Before life test: 30m ohm. max.
After life test: 50m ohm. max.
- 2 Insulation resistance : 1000M ohm min.
- 3 Withstand voltage : 500V AC applied between adjacent open terminals for one minute without breakdown.
- 4 Rated voltage : 1.5A MAXIMUM at 30VAC (R.M.S.) and current
- 5 Dielectric withstanding : 500V AC/1 minute without breakdown.
- 6 Insertion force : 35 Newtons maximum
- 7 Extraction force : 10 Newtons minimum

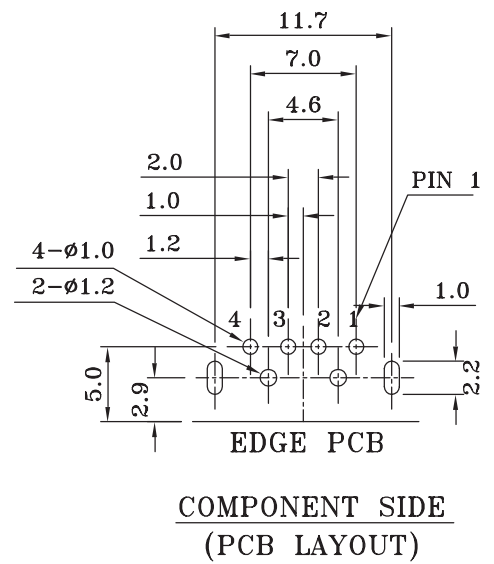

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	NYLON PA9T.G.F.	WHITE /BLACK		1
2	PIN TERM.	BRASS EH T:0.25 mm	GOLD/TIN PLATED	Ni:1~1.5u;TIN:3u. GOLD:1~3u	4
3	SHELL	BRASS T:0.3 mm	NICKEL PLATED	Ni:2~3u	1

TOLERANCE
±0.3

PANSTRONG COMPANY LTD.	DRAWN BY	TOMMY
	CHECKED	
TITLE:	USB, TYPE A PLUG FLAT90° DIP	
PART NO:	USBA4M0101X03	
File Number:		
SCALE	2:1	REV A
UNIT	mm	