

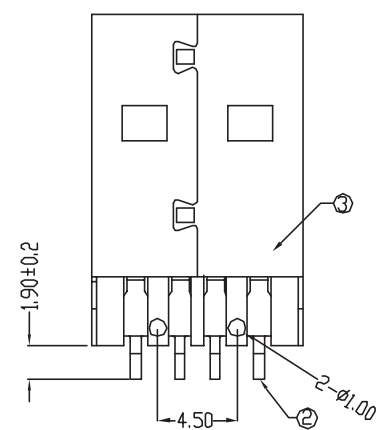

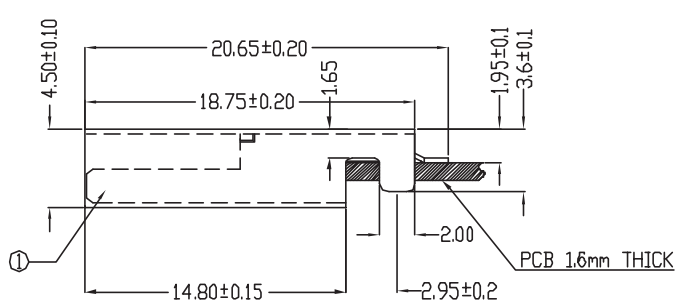


REV	DESCRIPTION	DATE
A	Initial Release	07:09:07
A0	Drawing Update	10:02:25

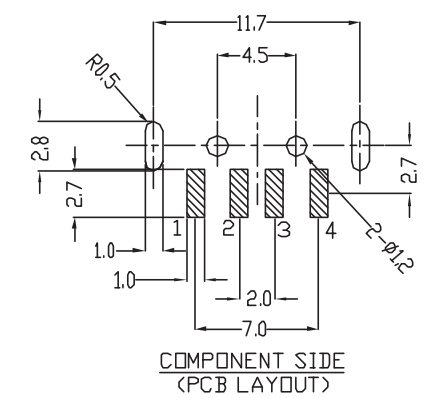

Specification:  
 Contact Resistance: 30m Ohm Max.  
 Insulation Resistance: 1000M Ohm Min. At 500VDC.  
 Rated Voltage And Current: 1.5A At 30VAC Minimum.  
 Dielectric Withstanding Voltage:  
 500V AC (rms) for 1 Minute(Rev. 2.0)  
 Durability (Life Test): 1500 Cycles  
 Insertion Force: 35 Newton Maximum.  
 Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	NYLON PA9T G.F.	BLACK		1
2	PIN TERM.	BRASS EH T:0.25 mm	GOLD/TIN PLATED	Gold:30u" ; Ni:40~60u" ; TIN:120u" (100% pure Tin of lead free plating)	4
3	SHELL	SPCC T:0.3 mm	NICKEL PLATED	Ni:80~120u"	1

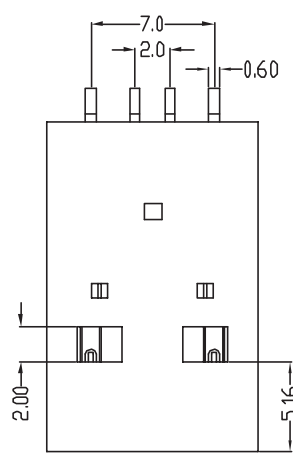

TOLERANCE
X. ±0.38
.X ±0.25
XX ±0.13
XXX ±0.05

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		USB. TYPE A PLUG FLAT 90° SMT		APPROVED			
PART NO:		UAR03LB-4MK30		DRAWING NO.			
SCALE		1:1	REV	A0	UNIT	mm	