


ROHS COMPLIANT

REV	DESCRIPTION	DATE
A	Initial Release	07,12,18

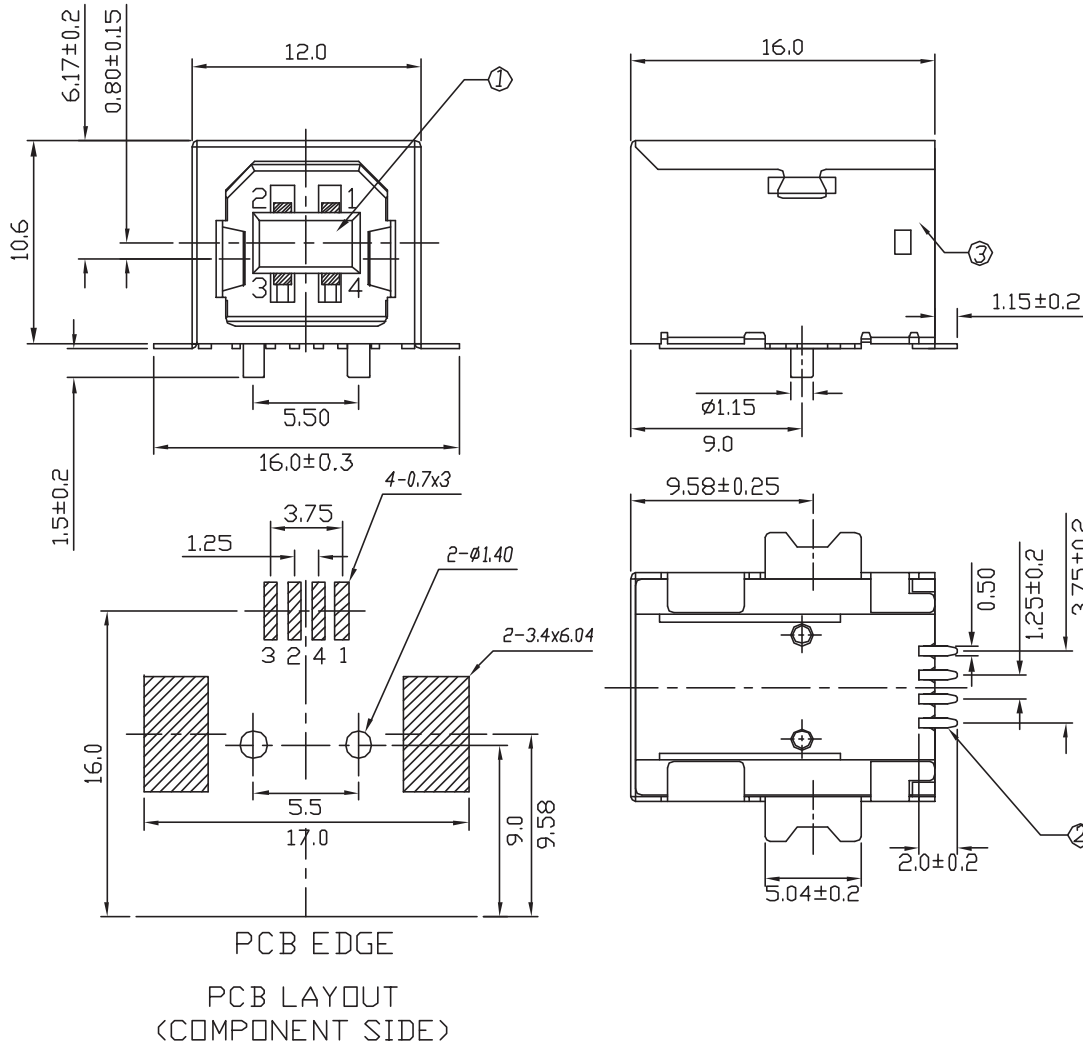

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 30VAC Minimum.

Dielectric Withstanding Voltage:

500V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	NI:50u" MINIMUM.

TOLERANCE
X: +0.38
XX: +0.25
XXX: +0.15
XXX: +0.05

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		USB B TYPE FLAT 4 PIN SMT				APPROVED	
PART NO:		UBR03-4FW01J-2				DRAWING NO.	
SCALE		1:1	REV	A	UNIT	mm	