



REV	DESCRIPTION	DATE
A	Initial Release	17.08.22


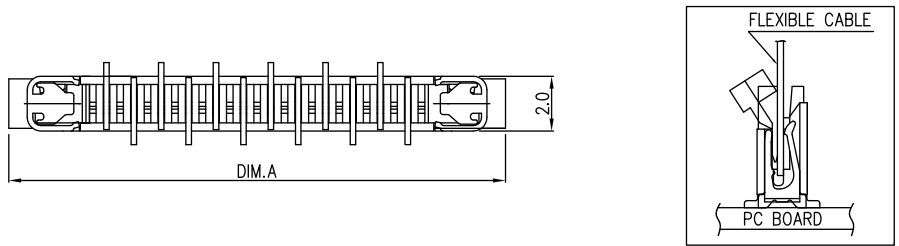


- SPEC :
- Housing: High-Temp Plastic, UL94-V  
Color: Black
  - Locker: High-Temp Plastic, UL94-V  
Color: Black
  - Contact: Phosphor Bronze  
Initial: 30m Ohms Max.  
Voltage Rating: 50V AC, DC
  - Solder Tab: BRASS
  - Temperature Rating: -25°C ~ +85°C
  - Dielectric Withstanding Voltage: 500V AC/Min

- PART NO.  
FPxx-C03SWZA-2GR  
1 23
- Contact Positions: 2...19
  - Contact Plating: Blank: Tin  
G : Flash Gold
  - Package: T: Tube  
R: Tape & Reel

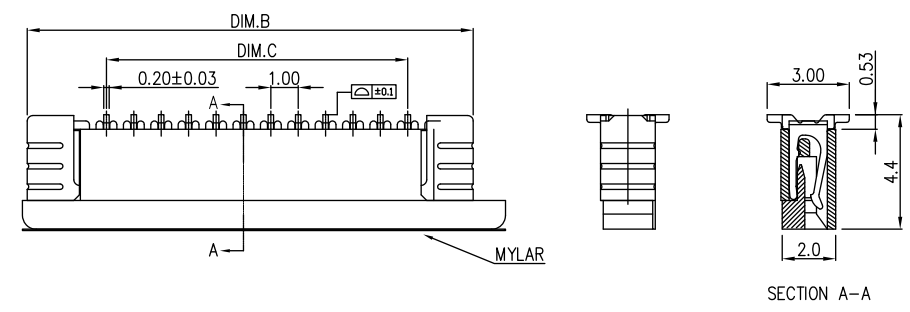

AVAILABLE CONTACT POLE NUMBERS				
PIN	DIM.A	DIM.B	DIM.C	DIM.D
4	10.10	9.10	3.00	5.10
5	11.10	10.10	4.00	6.10
6	12.10	11.10	5.00	7.10
7	13.10	12.10	6.00	8.10
8	14.10	13.10	7.00	9.10
9	15.10	14.10	8.00	10.10
10	16.10	15.10	9.00	11.10
11	17.10	16.10	10.00	12.10
12	18.10	17.10	11.00	13.10
13	19.10	18.10	12.00	14.10
14	20.10	19.10	13.00	15.10
15	21.10	20.10	14.00	16.10
16	22.10	21.10	15.00	17.10
17	23.10	22.10	16.00	18.10

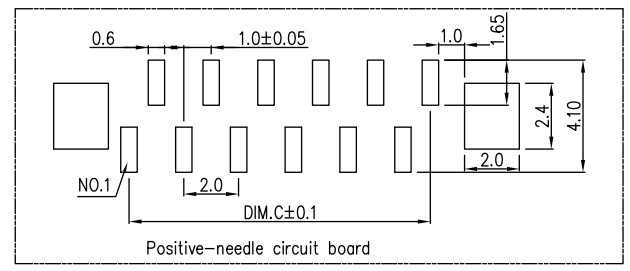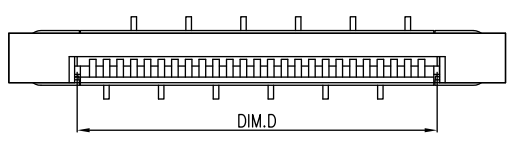

RoHS Compliant

TOLERANCE SCALE	
.X±0.30	None
.XX±0.20	UNIT
.XXX±0.10	mm

		DRAWN BY	TOMMY
		CHECKED	TOMMY
TITLE:	FPC P1.0 H4.4 SMT Vertical Type Type A: Pin 1 Left Down Row	APPROVED	CAROL
PART NO:	FPxx-C03SWZA-2	DRAWING NO.	
SCALE	/ REV A	UNIT	mm

