

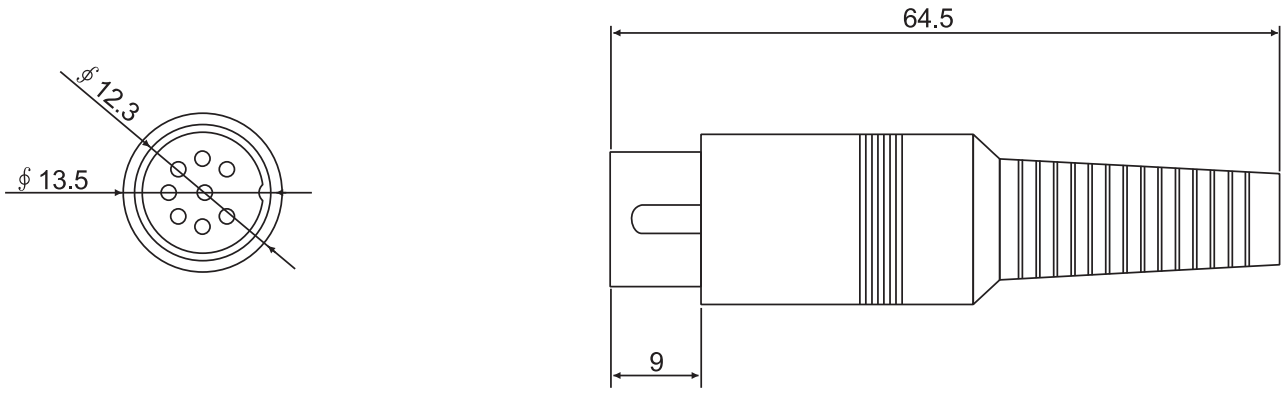


REV	DESCRIPTION	DATE
A	Initial Release	06'.03.08

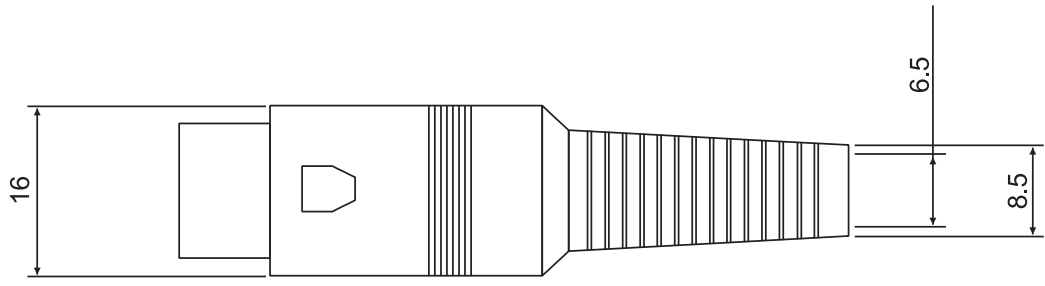

Specifications
rating: 100V AC 1A MAX
contact resistance:
pins-30mΩ MAX; shell-50mΩ MAX
insulation resistance:
MIN 100 MEGΩ @500V DC
voltage withstand:
250V AC R.M.S. for 1 minute



DN3M01KN-AE	DN4M01KN-AE	DN5M01KN-AE	DN5M01KN2-AE	DN5M01KN3-AE	DN6M01KN-AE	DN7M01KN-AE	DN8M01KN2-AE	DN8M01KN-AE

	PANSTRONG COMPANY LTD.			DRAWN BY	TOMMY
				CHECKED	TOMMY
TITLE:		DIN PLUG ASSEMBLY TYPE		APPROVED	CAROL
PART NO:		DN * M01KN-AE		DRAWING NO.	
SCALE	/	REV	A	UNIT	mm