
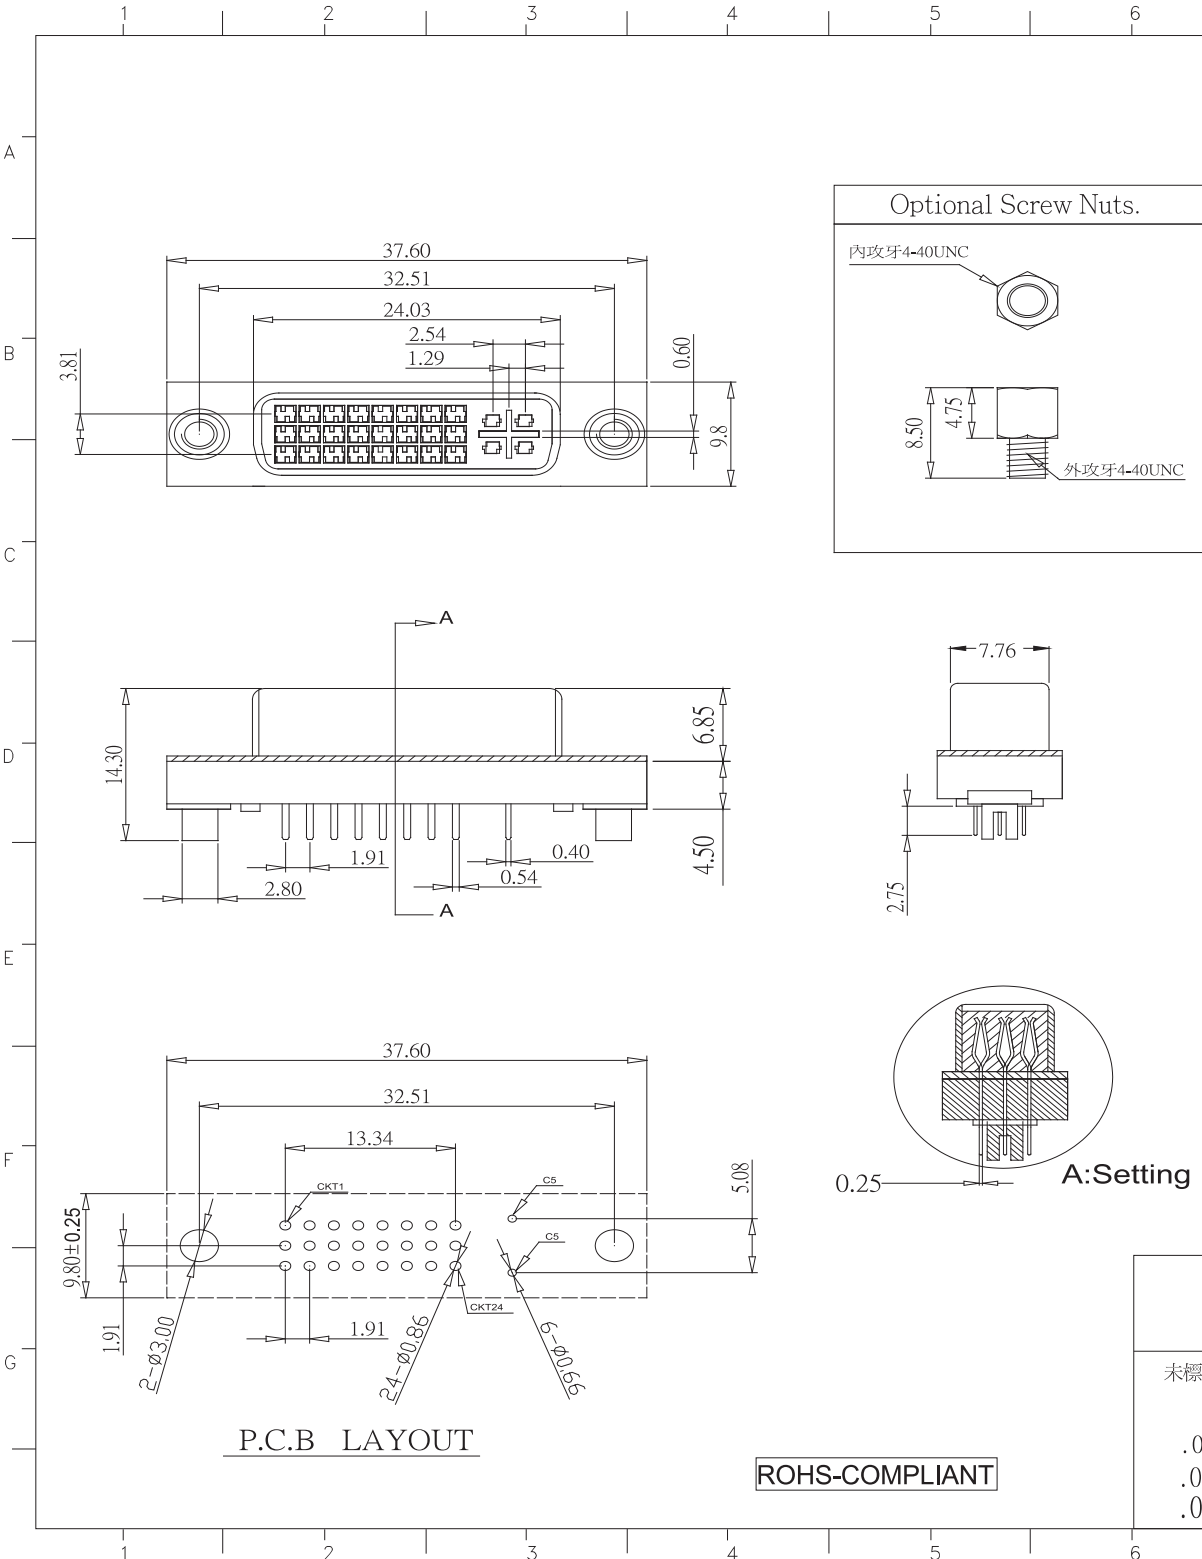




REV	DESCRIPTION	APPROVAL	DATE
A/0	新制定		05.06.14

- *MATERIAL**
BODY : PBT30% UL 94V-0 RATED, COLOR: WHITE
LATCH : PBT30% UL 94V-0 RATED, COLOR: WHITE
CONTACTS : BRASS
CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT AREA
TIN/LEAD PLATING ON TERMINAL
- *MECHANICAL**
MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE
UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @25 MM/MINUTE
DURABILITY: 100 MATING CYCLES
- *ELECTRICAL SPECIFICATION**
INSULATION RESISTANCE : 1000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ±50 V.60 HZ
CURRENT RATING: 1.5 AMPERES MIN
SHELL RESISTANCE: 50 MILIOHMS MAX.INITIAL; 50 MILIOHMS MAX.CHANGE FROM INITAL
CONTOCT RESISTANCE : 20 MILLOHMS MAX.
- *ENVIRONMENTAL**
OPERRATING TEMPERATURE : -20°TO85°
- *HOW TO ORDER**
DV 25 F 01 02 W 01 x S1
(1) (2) (3) (4) (5) (6) (7) (8)
- (1) PIN NUMBER
19 : 18+1
23 : 18+5
24 : 24+0
25 : 24+1
29 : 24+5
- (2) F : Female Receptacle.
(3) 01 : Through-Hole, Side for PCB
(4) 01: Right Angle / Side Entry.
02 : V ertical / Top Entry.
- (5) Insulator Color
K : Black
W : White.
- (6) Gold Plating on Contacts
01: Gold Flash.
- (7) Shell Material:
Blank : SPCC
Z : Zinc Alloy
- (8) Screw Nuts Option(2pcs):
S1:Attached Separately
S2:Fixed on Connector

 貝強實業有限公司 PANSTRONG COMPANY LTD.					DRAWN BY		TOMMY	
					CHECKED			
未標示公差尺寸值 METRIC .0= 0.35 .00= 0.25 .000= 0.15	TITLE:	DVI(24+1)180°			APPROVED			
	PART NO:	DV25F0102W01			DRAW NO		COSJ-008	
	DRAW. BOX NO:							
	SCALE	1:1	REV	A/0	UNIT	mm		
6	7	8	9		10		11	