


REV	DESCRIPTION	APPROVAL	DATE
	新制定		07'.03.16

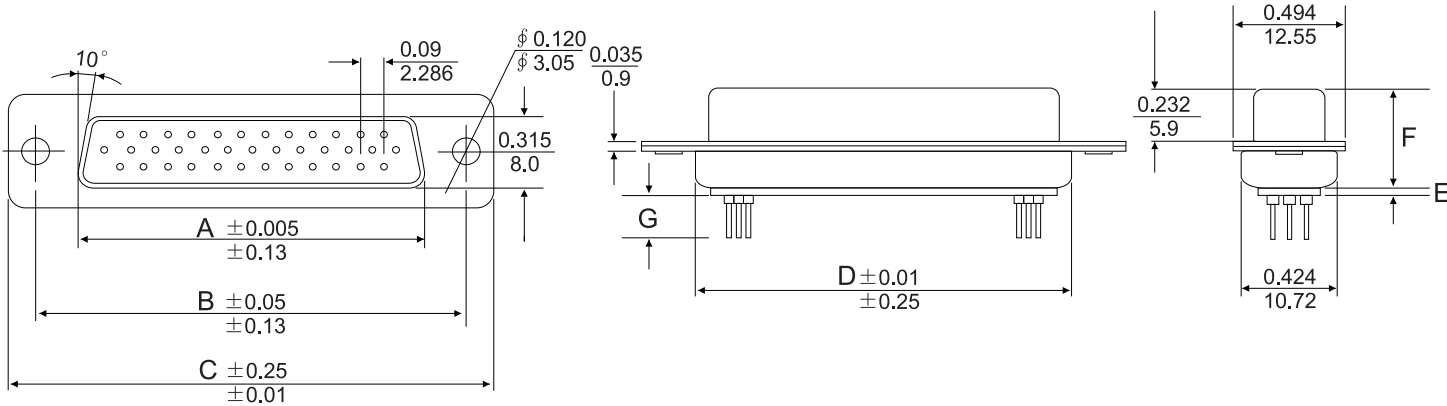

ITEM NO.	A	B	C	D	E	F	G
HD15F0402XGL	16.33(0.643)	24.99(0.984)	30.81(1.213)	19.28(0.759)	1.2(0.047)	11.0(0.433)	4.5(0.177)
HD26F0402XGL	24.66(0.91)	33.32(1.312)	39.14(1.541)	27.51(1.083)	1.2(0.047)	11.0(0.433)	4.5(0.177)
HD44F0402XGL	38.38(1.511)	47.04(1.852)	53.04(2.088)	41.3(1.625)	1.2(0.047)	11.0(0.433)	4.5(0.177)
HD62F0402XGL	54.84(2.159)	63.50(2.500)	69.32(2.729)	57.71(2.272)	1.2(0.047)	11.0(0.433)	4.5(0.177)
HD78F0402XGL	52.34(2.060)	61.11(2.406)	66.92(2.634)	55.30(2.177)	1.2(0.047)	11.0(0.433)	4.5(0.177)

MATERIAL & FINISH
SHELL:
STEEL
YELLOW CHROME (ZINC PLATED)
DR TIN PLATED

PIN CONTACT:
GOLD PLATED OVER NICKEL

INSULATOR:
PBT & GOLASS-FIBRE REINFORCED

NUMBER OF CONTACT:
15, 26 , 44, 62, 78

CURRENT RATING:
5 amp.

DIELECTRIC STRENGTH:
1000V FOR ONE MINUTE

INSULATOR RESISTANCE:
1000MΩ MIN. at 500V DC

TEMPERATURE:
-55°C ~ +105°C

 貝強實業有限公司 PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY	
	CHECKED			
TITLE:	"D-SUB" CONNECTOR H.D DIP STRAIGHT TYPE "SOCKET" MACHINED PIN			APPROVED
PART NO:	HDxxF0402XGL			DRAW NO
File Number:				
SCALE		REV		UNIT mm 