

REV	DESCRIPTION	APPROVAL	DATE
A	Initial Release		07.07.17

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.





Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40 to + 105

Terminated with L04b 2.54mm pitch flat ribbon cable.

Mating Suggestion : C 15 & C 16 series.

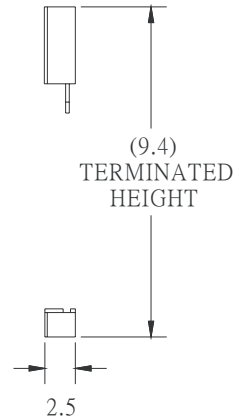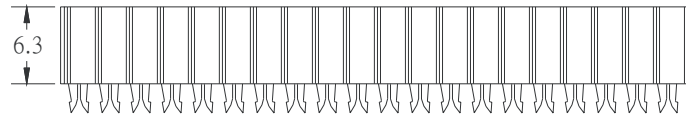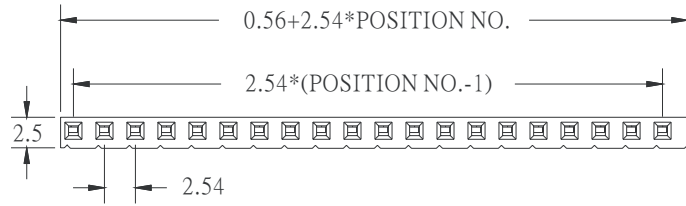

PART NO. DDCS_{xx}F 01 02 K_{xx}

Contact position

02
:
36

Contact Plating:

- T : Tin Plating
- S : Selective Flash Gold Plating
- G : Full Flash Gold Plating
- A : 5u" Gold
- B : 10u" Gold
- C : 15u" Gold
- D : 30u" Gold

 貝強實業有限公司 PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY
				CHECKED		
TITLE:		IDC SOCKET SINGLE ROW (SLIM TYPE)			APPROVED	
PART NO:		DDCS _{xx} F0102K			DRAW NO	
File Number:						
SCALE	/	REV	A	UNIT	mm	