
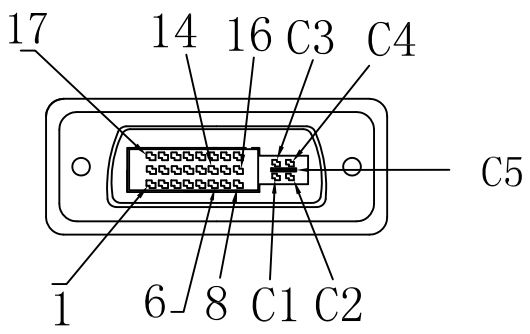
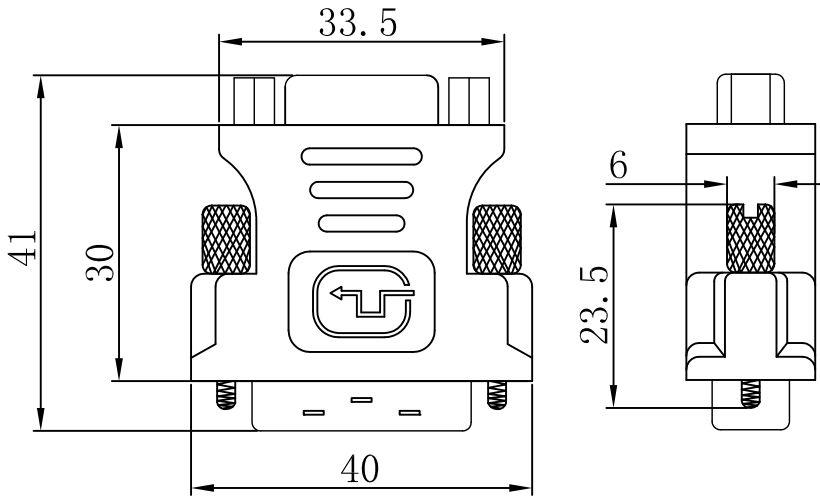


REV	DESCRIPTION	DATE
A	Initial Release	16.01.26

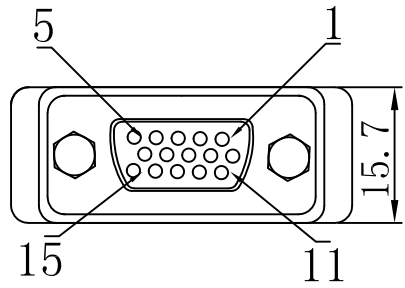

1. PIN ASSIGNMENT:

P1 H15F	P2 DVI24+5M
1-----	C1
2-----	C2
3-----	C3
13-----	C4
6+7+8-----	C5
5+10-----	15
9-----	14+16
14-----	8
12-----	7
15-----	6
SHELL-----	SHELL

2. ELECTRICAL TEST

- 100% SHOR-CURCUIT AND MIS-WIRING TEST
- A. VOLTAGE: DC 300V
- B. INSULATOR RESISTANCE : 5MΩ
- C. ON-RESISTANCE : 5-10Ω

RoHS Compliant

NO.	PART NO.	DESCRIPTION	Q, TY	UNIT
1	WIRE	UL 1007 28AWG SINGLE WIRE L=30mm	11	PCS
2	CONNECTOR	DVI (24+5) M WHITE INSULATOR, NI PLATED SHELL	1	PCS
3	CONNECTOR	HD15F BLUE INSULATOR, FRON NI REAR TIN PLATED, WITH UNC#4-40 NUTS	1	PCS
4	SCREW	6*23mm THUMB SCREWS	2	PCS
5	INNER MOLD	PE (DE-1018)	9	g
6	OUTER MOLD	45P Black PVC (DE-1038)	19	g
7	PE BAG	0.05*3"*6" PE SINGLE PACK	1	PCS
8	CARTON	33*23.5*26.5cm		

UNLESS OTHERWISE SPECIFIED TOLERANCE:
0 ±1
0.0: ±0.5
0.00: ±0.2

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		DVI 24+5 Male to VGA Female Adapter				APPROVED	
PART NO:		AD-DV29M/HD15FK				DRAWING NO.	
SCALE	1:1	REV	A	UNIT	mm		