


REV	DESCRIPTION	DATE
A	Initial Release	13.01.24

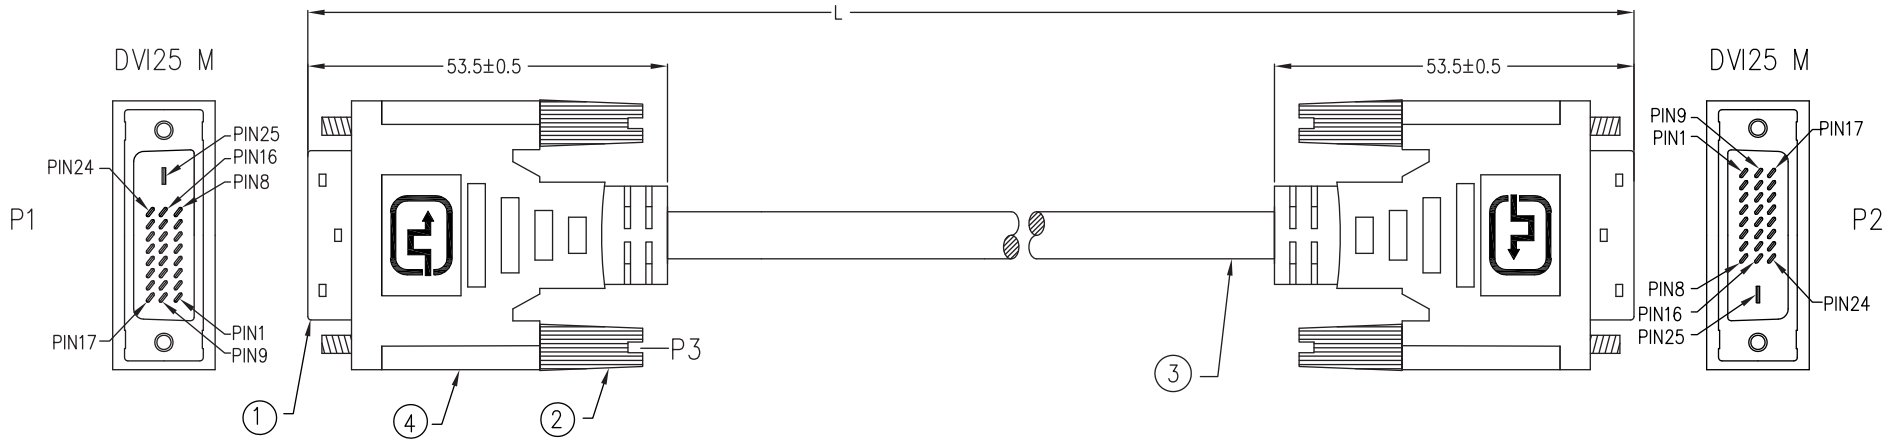

\* NOTE: All relevant materials are complied with RoHS directive .

3267-5			
P1	P2	P1	P2
1	1 BROWN	14	14 ORANGE
2	2 WHITE	15	15 YELLOW
3	3 SHIELD	16	16 WHITE
4	4 RED	17	17 BLUE
5	5 WHITE	18	18 WHITE
3	3 SHIELD	19	19 SHIELD
6	6 RED	20	20 YELLOW
7	7 PURPLE	21	21 WHITE
9	9 GREEN	19	19 SHIELD
10	10 WHITE	23	23 GREY
11	11 SHIELD	24	24 WHITE
12	12 ORANGE	22	22 SHIELD
13	13 WHITE SHIELD		SHIELD
11	11 SHIELD		SHIELD

No.	DESCRIPTION		Q'TY	Supplier
4	BLACK HEAT SHRINK TUBE $\varnothing$ 0.8*13mm	A4HA22-0959	14	M959
	BLACK HEAT SHRINK TUBE $\varnothing$ 2.5*10mm	A4HA62-0959	14	M959
	DVI25 TINPLATE	A6GE10-0363	2	M363
	MOLDED PVC WHITE	H1BF01-0304B12	2	M304
3	UL20276 [(28AWG*1P+AL+D+MY)*7PCS+(28AWG*1PAIR)+(28AWG*3C)]+AL+D+AM BRAID(65%), OD 8.6mm, JACKET WHITE , DRAWING No. EAAB2807P2801P2803C-287	H5DF05-0304B12	L-20mm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 44.25mm, WHITE	A6AE03-0095	4	M95
1	DVI25 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	A1KD02-0656	2	M656
No.	DESCRIPTION		Q'TY	Supplier

		DRAWN BY		TOMMY
		CHECKED		
TITLE:		DVI Cable Assembly (Dual Link)		APPROVED
PART NO:		CDV24+1Mx2-28W-*M		DRAWING NO.
SCALE	/	REV	A	UNIT mm

Cable Length	Unless Other Spec.
Tolerances:	
0 ~ 200mm	±10mm
200 ~ 1000mm	±20mm
1000 ~ 1500mm	±25mm
1500 ~ 2100mm	±30mm
2100mm ↑	±40mm