



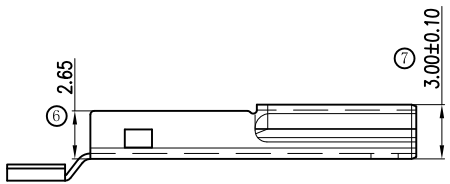

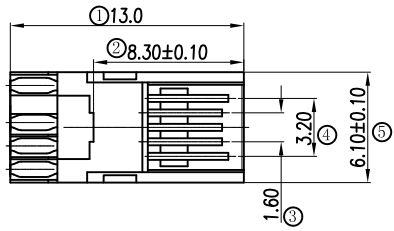
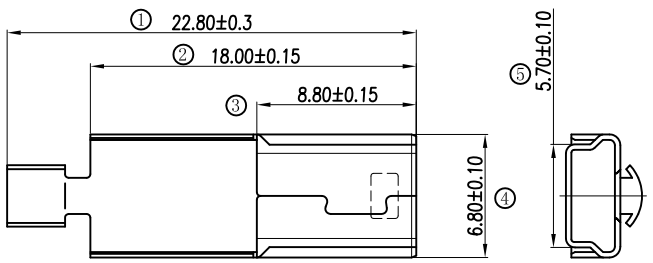
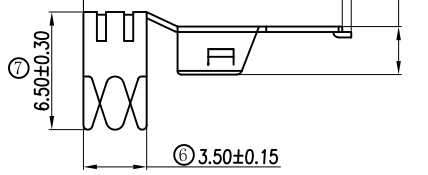



REV	DESCRIPTION	DATE
A	Initial Release	12.12.18

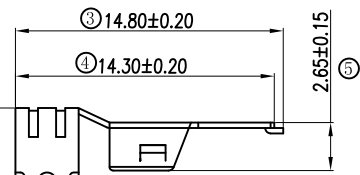

Note:
Specification:
1. Current rating: 1 A Max.
2. Dielectric withstanding voltage:
30 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance:
1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

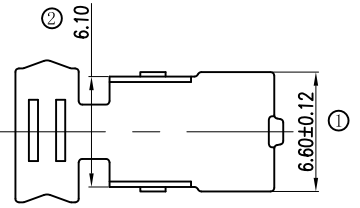

4	Back Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
3	Front Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
2	Contact	5	Brass	T=0.25mm	Contact area: 0.8u"min Gold Plated over 50u"Nickel min Solder area:100u"min Tin Plated over 50u"Nicked Min.
1	Housing	1	LCP	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

ROHS Compliant

TOLERANCE UNSPECIFIED	
.X	±0.30
.XX	±0.20
.XXX	±0.10
ANG	±1°

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED		TOMMY	
TITLE:		MINI USB 5M(B) SOLDER		APPROVED		CAROL	
PART NO:		MUSBB5M01K01		DRAWING NO.			
SCALE		1:1	REV	A	UNIT	mm	