



REV	DESCRIPTION	DATE
A	Initial Release	09'.12.01

ELECTRICAL CHARACTERISTICS:
30V DC/AC 1A Max.
CONTACT RESISTANCE: 30mΩ Max.
INSULATION RESISTANCE:
100MΩ Min.at 500V DC.
DIELECTRIC STRENGTH:
750V AC/1 minute.
INSERTION FORCE:3.6kgf MAX
WITHDRAWAL:1.0kgf MIN

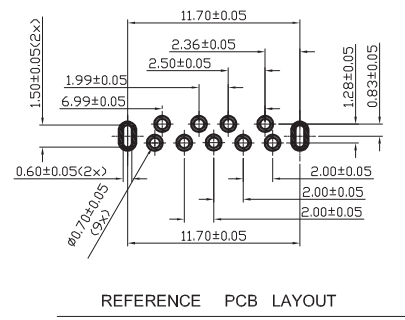

REFERENCE PCB LAYOUT

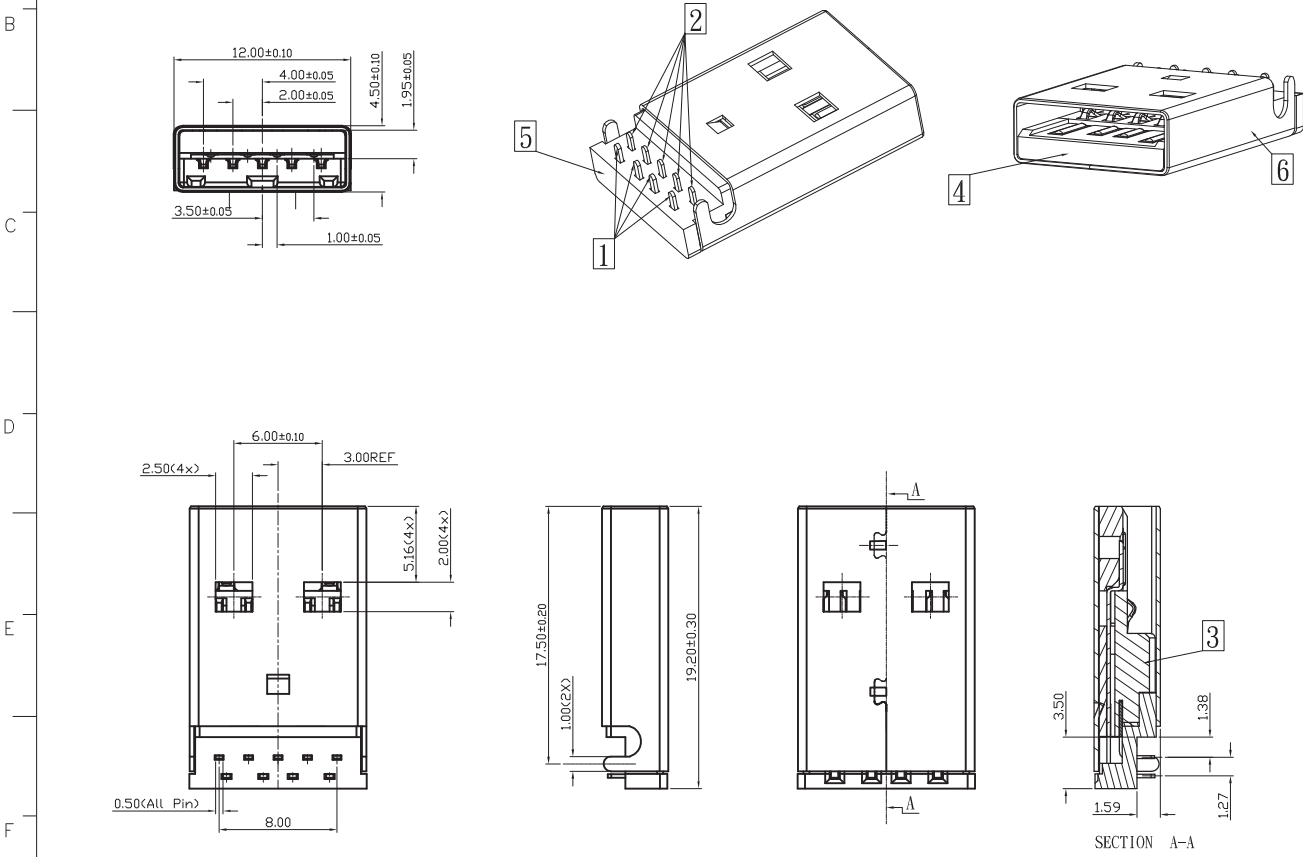

PANSTRONG COMPANY LTD.

TITLE: USB 3.0 A Type Male DIP				DRAWN BY		TOMMY	
				CHECKED		TOMMY	
PART NO: UB3AR01LB-9MB				APPROVED		CAROL	
				DRAWING NO.			
SCALE		2:1	REV	A	UNIT	mm	

Tolerance unless otherwise specified			
X.	± 0.50	X'	± 5°
XX	± 0.30	XX'	± 2°
XXX	± 0.20	XXX'	± 0.5°
XXXX	± --		