



REV	DESCRIPTION	DATE
A	Initial Release	07'.03.12

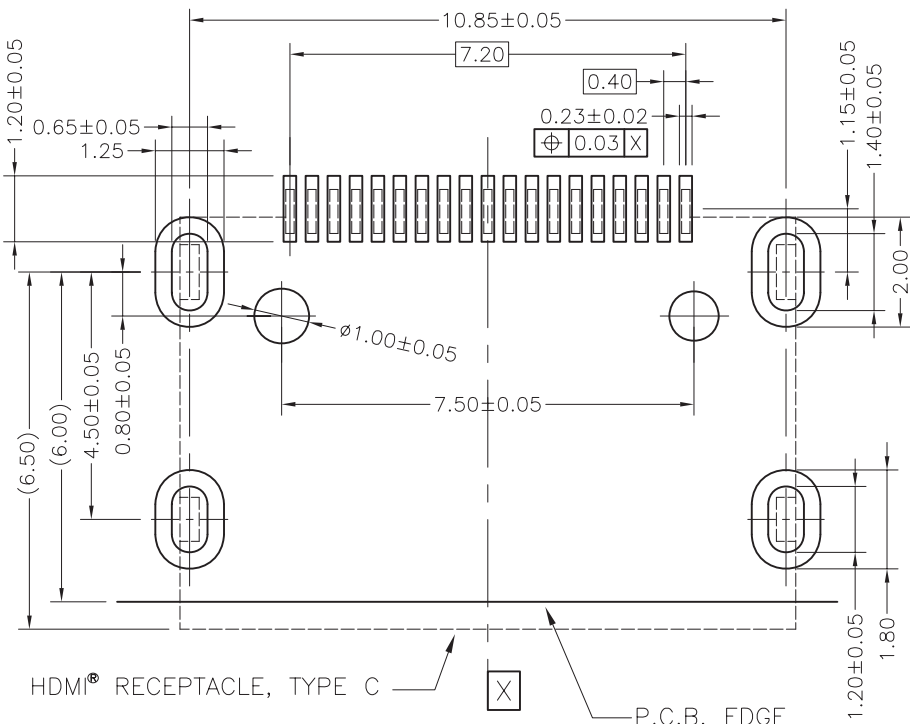

RECOMMENDED PCB LAYOUT

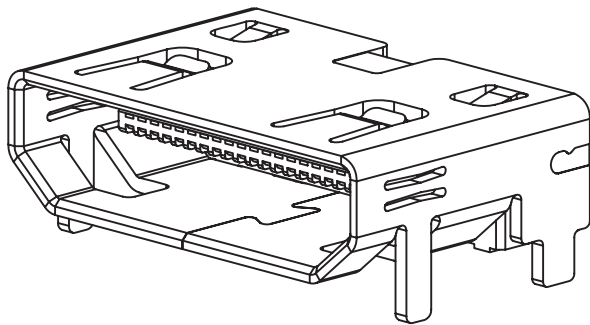

RoHS Compliant

SPECIFICATIONS

OPERATING CURRENT: 0.5A MAX.
OPERATION TEMPERATURE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADIACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADIACENT TERMINAL(MATE)
INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)

(The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.)

TOLERANCE UNSPECIFIED	±
	±0.15
	±0.20
	±0.30
ANGLE	± 1°

 PANSTRONG COMPANY LTD.					DRAWN BY		TOMMY	
					CHECKED			
TITLE:		HDMI [®] RECEPTACLE, TYPE C PITCH 0.40 SMT TYPE			APPROVED			
					DRAWING NO.			
PART NO:		MHI03R-19FK30A1						
SCALE		1:1	REV	A	UNIT	mm		