

REV	DESCRIPTION	DATE
A	Initial Release	17.08.23

SPEC :






- Housing:High-Temp Plastic,UL94-V
Color:Natural
- Locker:High-Temp Plastic,UL94-V
Color:Black
- Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
- Solder Tab:BRASS
- Temperature Rating:-25°C~+85°C
- Dielectric Withstanding Voltage:500V AC/Min

PART NO.
FP xx -E03RWDZ-2 G R
1 2 3

- Contact Positions: 40...60
- Contact Plating:
Blank: Tin
G: Flash Gold
- Package:
T: PVC Tube
R: Tape & Reel

PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	
4	7.6	6.50	1.50	2.60	4.4	35	23.1	22.00	17.00	18.10	4.9	
5	8.1	7.00	2.00	3.10		36	23.6	25.50	17.50	18.60		
6	8.6	7.50	2.50	3.60		37	24.1	23.00	18.00	19.10		
7	9.1	8.00	3.00	4.10		38	24.6	23.50	18.50	19.60		
8	9.6	8.50	3.50	4.60		39	25.1	24.00	19.00	20.10		
9	10.1	9.00	4.00	5.10		40	25.6	24.50	19.50	20.60		
10	10.6	9.50	4.50	5.60		41	26.1	25.00	20.00	21.10		
11	11.1	10.00	5.00	6.10		42	26.6	25.50	20.50	21.60		
12	11.6	10.50	5.50	6.60		43	27.1	26.00	21.00	22.10		
13	12.1	11.00	6.00	7.10		44	27.6	26.50	21.50	22.60		
14	12.6	11.50	6.50	7.60		45	28.1	27.00	22.00	23.10		
15	13.1	12.00	7.00	8.10		46	28.6	27.50	22.50	23.60		
16	13.6	12.50	7.50	8.60		47	29.1	28.00	23.00	24.10		
17	14.1	13.00	8.00	9.10		48	29.6	28.50	23.50	24.60		
18	14.6	13.50	8.50	9.60		49	30.1	29.00	24.00	25.10		
19	15.1	14.00	9.00	10.10		50	30.6	29.50	24.50	25.60		
20	15.6	14.50	9.50	10.60		51	31.1	30.00	25.00	26.10		
21	16.1	15.00	10.00	11.10		52	31.6	30.50	25.50	26.60		
22	16.6	15.50	10.50	11.60		53	32.1	31.00	26.00	27.10		
23	17.1	16.00	11.00	12.10		54	32.6	31.50	26.50	27.60		
24	17.6	16.50	11.50	12.60		55	33.1	32.00	27.00	28.10		
25	18.1	17.00	12.00	13.10		56	33.6	32.50	27.50	28.60		
26	18.6	17.50	12.50	13.60		57	34.1	33.00	28.00	29.10		
27	19.1	18.00	13.00	14.10		58	34.6	33.50	28.50	29.60		
28	19.6	18.50	13.50	14.60		59	35.1	34.00	29.00	30.10		
29	20.1	19.00	14.00	15.10		60	35.6	34.50	29.50	30.60		
30	20.6	19.50	14.50	15.60								
31	21.1	20.00	15.00	16.10								
32	21.6	20.50	15.50	16.60								
33	22.1	21.00	16.00	17.10								
34	22.6	21.50	16.50	17.60								

 PANSTRONG COMPANY LTD.					DRAWN BY		TOMMY	
					CHECKED			
TITLE:		FPC Connector, ZIF Type, Pitch 0.5mm, H 2.0, SMT, R/A Lower Contact			APPROVED			
PART NO:					DRAWING NO.			
SCALE		/	REV	A	UNIT	mm		

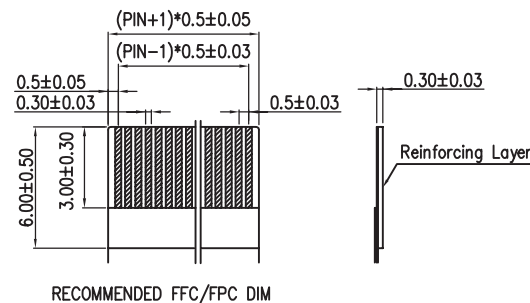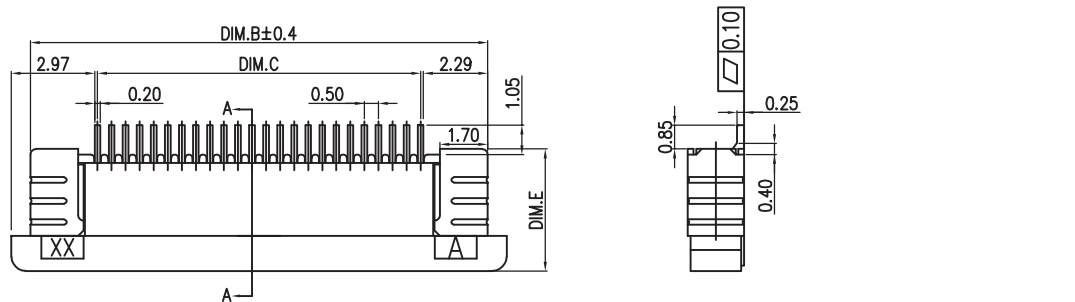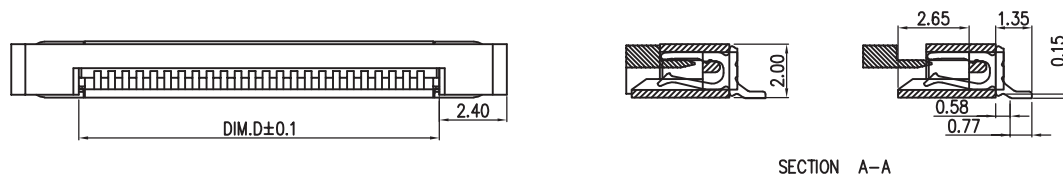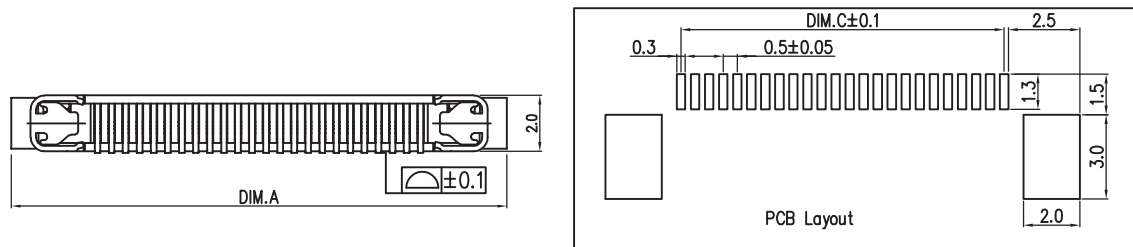

RoHS Compliant

TOLERANCE
.X±0.30
.XX±0.20
.XXX±0.10