REV	DESCRIPTION	DATE
A	Initial Release	21'.04.16

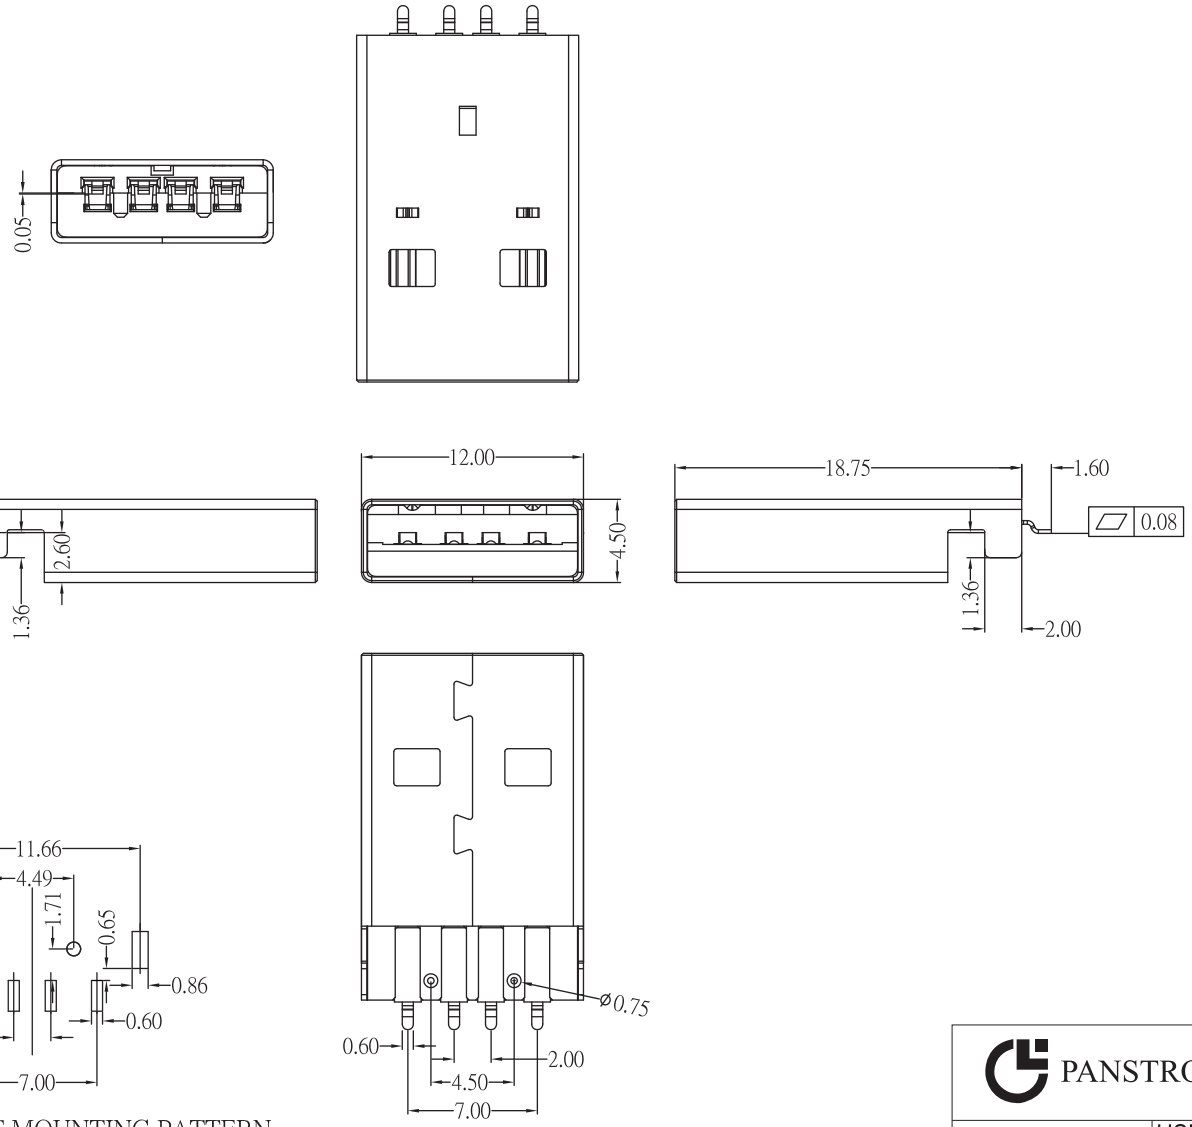

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

1.Rating: 30V DC , 1.5A

1.Contact Resistance: 30 mΩ Max

2.Dielectric Withstanding Voltage: 500 V AC AT Sec Level

3.Insulation Resistance: 1,000 MΩ Min

Material:

1.Housing: LCP

2.Contact: BRASS

3.Shell: BRASS / SPCC

Finish:

1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.Shell: Nickel under Plated surface layer

PART NO.

UAR03LB-4MK $\frac{**}{1}\ \frac{*}{2}\ \frac{*}{3}\ 2\ \frac{*}{4}$

1.Contact Plating:
01: Front Contact Flash Gold, Solder Tail: Tin
30: Front Contact 30u" Gold, Solder Tail: Tin

2.Shell Material
C: Brass
S: SPCC

3.Shell Plating:
J: Nickel

4.Package
Blank: PVC Tray
R: Tape & Reel

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

PANSTRONG COMPANY LTD.				DRAWN BY	TOMMY
				CHECKED	TOMMY
TITLE:	USB A Type Male Plug ,SMT R/A, Middle Mount, Straight Shell Pins, On Board H1.95mm			APPROVED	CAROL
PART NO:	UAR03LB-4MK**SJ2*			DRAWING NO.	
SCALE	1:1	REV	A	UNIT	mm