
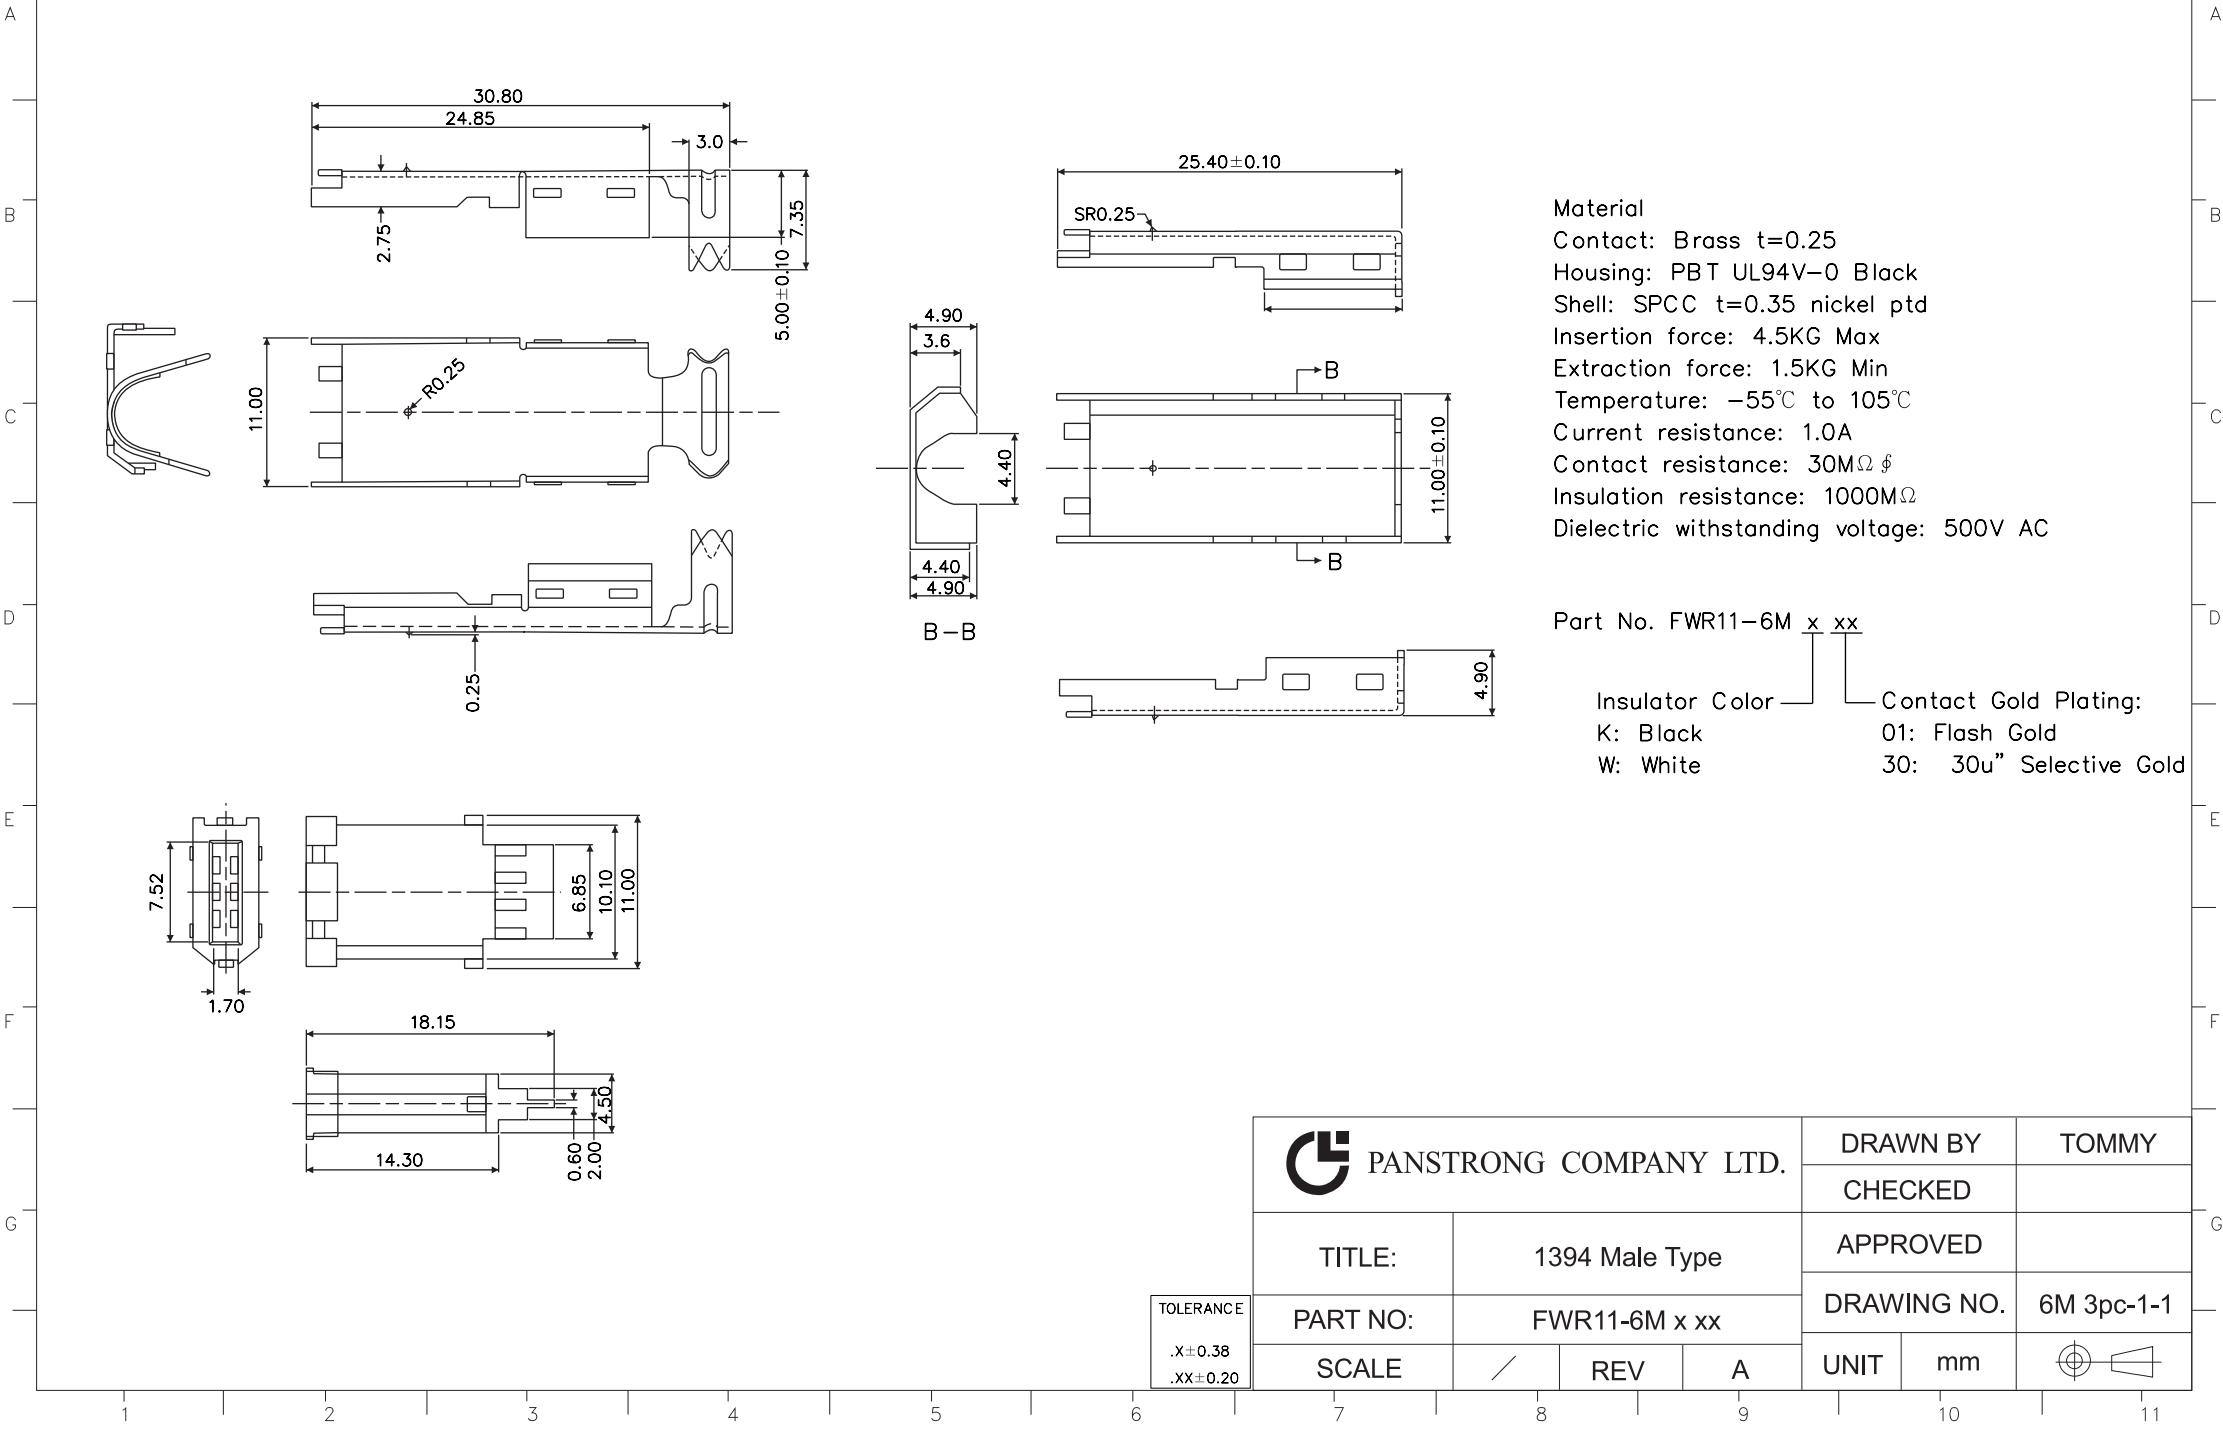


REV	DESCRIPTION	DATE
A	Initial Release	08'.10.05



Material
Contact: Brass t=0.25
Housing: PBT UL94V-0 Black
Shell: SPCC t=0.35 nickel ptd
Insertion force: 4.5KG Max
Extraction force: 1.5KG Min
Temperature: -55°C to 105°C
Current resistance: 1.0A
Contact resistance: 30MΩ
Insulation resistance: 1000MΩ
Dielectric withstanding voltage: 500V AC

Part No. FWR11-6M x xx
Insulator Color Contact Gold Plating:
K: Black 01: Flash Gold
W: White 30: 30u" Selective Gold

 PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY	
	CHECKED			
TITLE:		1394 Male Type		APPROVED
PART NO:		FWR11-6M x xx		DRAWING NO. 6M 3pc-1-1
SCALE		/	REV	A
		UNIT	mm	

TOLERANCE
.X ± 0.38
.XX ± 0.20