


REV	DESCRIPTION	DATE
A	Initial Release	11.04.19

Note:

Specification:

- Rated voltage and current: 1A Max.
- Dielectric withstanding voltage: 30V(ac) for 1 minute.
- Contact resistance:Before life test 30m ohm Max.
After life test 50m ohm max
- Insulation resistance: 100M ohm Min at DC 500V.
- Insertion force: 35 Newtons Max.
- Extraction force: 10 Newtons Min.
- Solderability:Terminal shall be immersed in flux before text,Then dip in molten solder for 5±0.5 sec. At 245±5°C
- Temperature range:-55°C~+85°C

5	Back Shell	1	SPCC	T=0.30mm	80u"min Nickel Plated
4	FrontShell	1	SPCC	T=0.30mm	80u"min Nickel Plated
3	Contact	4	Brass	T=0.25mm	Contact area:0.8u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
2	Contact	5	Phosphor bronze	T=0.25mm	Contact area:0.8u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	2	PBT	UL 94-V0	Blue/Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish








 PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY
				CHECKED		TOMMY
TITLE:				APPROVED		CAROL
PART NO:				DRAWING NO.		
SCALE				UNIT	mm	
				1:1	REV	A

PART NO.

UB3B11 - $\frac{9}{1}$ M $\frac{B}{2}$ $\frac{30}{4}$ $\frac{J}{5}$ - $\frac{2}{6}$

- Type: A or B
- No of Contact: 9 Positions
- M: Plug
- Insulator Color: B: Blue
- Contact Plating:
01: Selective Gold Flash
03: 3u" Selective Gold
15: 15u" Selective Gold
30: 30u" Selective Gold
- Shell Plating:
J: Nickel
G: Gold Flash

TOLERANCE UNSPECIFIED	
.X	±0.30
.XX	±0.20
.XXX	±0.10
ANG	±1°

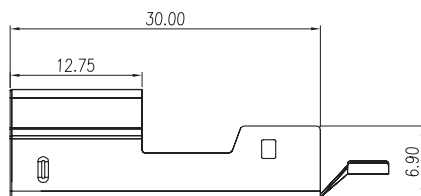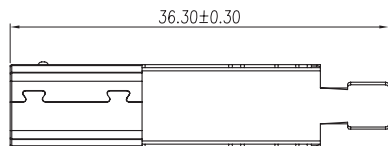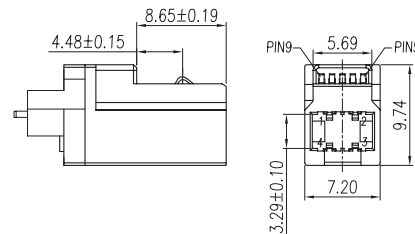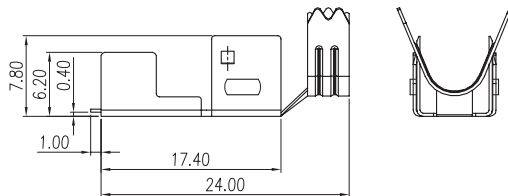

ROHS Compliant